

**ADDENDUM #2**  
**To the Bid Documents for the**  
**Tennis Center HVAC Upgrade Project**

**Date: March 6, 2017**

**To All Bidders of Record:**

**The following changes, additions, and/or deletions are hereby made a part of the Bid Documents for the above noted project, fully and completely as if the same were fully contained therein. All other terms, conditions, and specifications of the original Bid Documents remain unchanged.**

**CHANGES TO SPECIFICATIONS;**

**1. 23 34 16 – Centrifugal HVAC Fans**

- a. Under Article 2.01 MANUFACTURERS, sub-paragraph A, Change “ACWD VF” to “SQND-EC”
- b. Delete Articles 2.02 through 2.04 and Replace with the following:
  - i. “2.02 SQUARE INLINE FAN - Fan shall be UL Listed, bolted construction with side access doors sealed with closed cell neoprene gasketing, Wheel shall be Centrifugal backward inclined, 100% aluminum and balanced in accordance with AMCA Standard 204-05. Motor shall be electronically commutated rated for continuous duty.”

**2. CHANGES TO DRAWINGS;**

- a. Drawing M610 – MECHANICAL SCHEDULES AND DETAILS
  - i. Modify FAN SCHEDULE as indicated in attached sketch MSK01.

**All Bidders shall include a printed and signed copy of this Addendum with their bid submittal. The Bidder’s signature below acknowledges the receipt of Addendum #2, issued March 6, 2017 for the Tennis Center HVAC Upgrade Project.**

**ADDENDUM #1 RECEIVED:**

**Bidder’s Signature:** \_\_\_\_\_

**Bidder’s Name:** \_\_\_\_\_

**Company Name:** \_\_\_\_\_

**Date:** \_\_\_\_\_

## DIFFUSERS, REGISTERS AND GRILLES SCHEDULE

MARK	MODEL	SIZE	NECK	DAMPER	MATERIAL	REMARKS
S-1	TMS	24/24	12"∅	OBD	ST	1
S-2	EOS	24/4	8" OVAL	-	ST	1
S-3	EOS	48/4	10" OVAL	-	ST	1
S-4	EOS	48/4	12" OVAL	-	ST	1
S-5	TBDI-80	24/5	8"∅	-	ST	1, 2
R-1	PAR	24/24	10"∅	-	ST	1
R-2	PAR	24/24	14"∅	-	ST	1


1. MODEL BASED ON TITUS.
2. TWO 1-1/2 INCH SLOTS. BALANCE THROW AS 2-WAY, HORIZONTAL.

## FAN SCHEDULE

MARK	AIR FLOW RATE (CFM)	EXTERNAL S.P. (IN WG)	TYPE	MOTOR (HP)	ELECTRICAL (V/PH/HZ)	AREA SERVED	LOCATION	MODEL	NOTES
EF-1	3000	0.625	INLINE	1.0 ECM	208/1/60	AHU-1	134	SQND-EC	1, 2 <span style="border: 1px solid black; padding: 2px;">2</span>

**NOTES**

1. MODEL BASED ON COOK. PROVIDE WITH PRESSURE CONTROL FOR ECM MOTORS.
2. PROVIDE WITH MOTORIZED BACKDRAFT DAMPER. 2

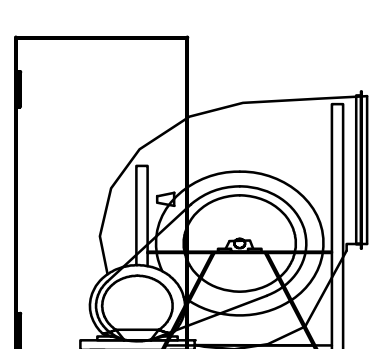

Klubber

Architects + Engineers

Batavia, Illinois 60510  
tel. 630.406.1213

Gurnee, Illinois 60031  
tel. 847.336.3428

REF. DWG. : M610

ISSUED WITH: ADDENDUM NO. 2

JOB NO. 16-310-1053

DRAWN DDW

DATE 03/03/17

SKETCH NUMBER

### TENNIS CENTER HVAC UPGRADE

OAK BROOK PARK DISTRICT  
1450 FOREST GATE ROAD  
OAK BROOK, ILLINOIS 60523

# MSK01

P:\1053 - Oak Brook Park District - HVAC Upgrade\30\_Design\Drawings\DD-CD\30\_Mech\1053M0610.dwg, 3/3/2017 4:21:46 PM, ddw