Oak Brook Park District

DOOR AND WINDOW REPLACEMENT


1500 Forest Gate Road

Oak Brook, IL 60523

SCHEDULE OF DRAWINGS

A-101.2 FIRST FLOOR PLAN, DOOR / FRAME SCHEDULE, DOOR / FRAME TYPES AND DETAILS

SITE LOCATION MAP

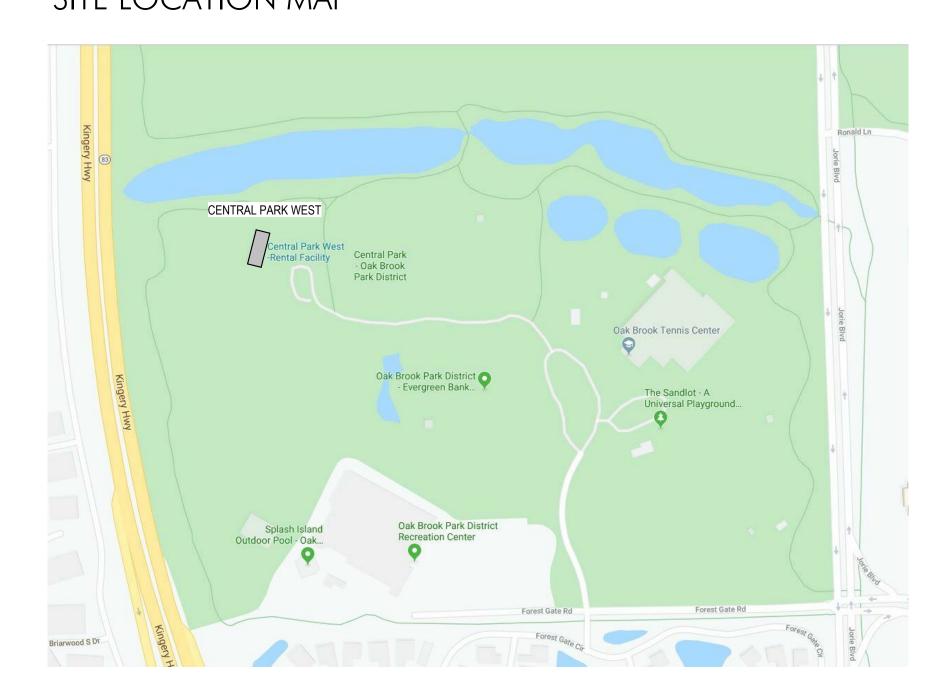

BOARD OF COMMISSIONERS

SHARON KNITTER, President TOM TRUEDSON, Vice President LARA SULEIMAN, Commissioner FRANK TROMBETTA, Commissioner KEVIN TRAN, Treasurer

RELEASE

ISSUED FOR BIDDING

DATE OF ISSUE

11.22.19

ARCHITECT'S PROJECT NUMBER

220005.00

CHECKED BY

TITLE SHEET

revisions

220005.00 11.22.19

LEGATARCHITECTS DESIGN | PERFORMANCE | SUSTAINABILITY



LEGATARCHITECT

Oak Brook

Park District

DOOR AND

WINDOW

REPLACEMENT

	ABBREVIATIONS		ABBREVIATIONS		ABBREVIATIONS		ABBREVIATIONS	GENERAL NO
ABB	DESCRIPTION	ABB	DESCRIPTION	ABB	DESCRIPTION	ABB	DESCRIPTION	ALL WORK SHALL BE COMPLIANT WITH THE REGULATIONS OF THE AUTHORITIES HAVIN
	AIR CONDITIONING	EP	ELECTRICAL PANEL	MD	MASONRY DIMENSION	RO	ROUGH OPENING	PROJECT LOCATION.
1	ABOVE	EQ	EQUAL	MDF	MEDIUM DENSITY FIBERBOARD	ROW	RIGHT OF WAY	2. THE TRADE CONTRACTORS' PERSONNEL SI PROJECT SITE WITHOUT COMPLYING WITH
	ARCHTECTURAL CONCRETE	EWC	ELECTRIC WATER COOLER	MECH	MECHANICAL	RP	RESIN PANEL	PROTOCOLS.
1	ALUMINUM COMPOSITE MATERIAL	EWS	EYE WASH STATION	MED	MEDIUM	RSE	ROLLER SHADE - MOTORIZED	3. WHERE CONFLICTS EXIST WITHIN OR BETW
	ACOUSTIC CEILING TILE	EX / EXIST	EXISTING	MEZZ	MEZZANINE	RSES	SKYLIGHT ROLLER SHADE - MOTORIZED	DOCUMENTS, OR BETWEEN THE CONTRAC
	AMERICANS WITH DISABILITIES ACT	EXP	EXPOSED EXISTING TO REMAIN		MANUFACTURER MANHOLE	RSL	ROLLER SHADE LEFT CONTROL	STANDARDS, CODES, ORDINANCES, AND R STRINGENT OR HIGH QUALITY OR GREATE
	ADJACENT AUTOMATIC DOOR OPENER	EXR	FLUSH DOOR	MH	MINIMUM / MINUTE	RSK	ROLLER SHADE RIGHT CONTROL RESILIENT TRANSITION	SHALL APPLY. LARGE-SCALE DRAWINGS T
ıP	AUTOMATIC DOOR OPENER AUTOMATIC DOOR OPENER ON PEDESTAL	F	FACE OF	MISC	MISCELLANEOUS	RTU	ROOF TOP UNIT	SCALE DRAWINGS; FIGURED DIMENSIONS
<u> </u>	ARCHITECTURALLY EXPOSED CONCRETE	FAAP	FIRE ALARM SYSTEM ANNUNCIATOR PANEL	MI	MATCH LINE	RUBR	RUBBER	SCALED DIMENSIONS; AND NOTED MATERI GRAPHIC REPRESENTATIONS.
	AUTOMATED EXTERNAL DEFIBRILLATOR	FAB	FABRIC	MO	MASONRY OPENING	SC	SHOWER CURTAIN	4. THE CONTRACT DOCUMENTS IDENTIFY TH
3	ARCHITECTURALLY EXPOSED STRUCTURAL STEEL	FACP	FIRE ALARM CONTROL PANEL	MP	METAL PANEL	SD	SOAP DISPENSER	REQUIRED. TRADE CONTRACTORS SHALL
<u>-</u>	ABOVE FINISHED FLOOR	FAP-X	FABRIC WRAPPED ACOUSTIC PANEL - (X =	MST	MOSAIC TILE	SECT	SECTION	NECESSARY FOR A COMPLETE INSTALLAT
	AIR HANDLING UNIT		THICKNESS OF THE PANEL)	MSTB	MOSAIC TILE BASE	SHT	SHEET	5. REFER TO THE PROJECT MANUAL FOR PROCEDURES NOT IDENTIFIED ON THE CO
	AIR INFILTRATION BARRIER	FB	FACE BRICK	MT	METAL TRANSITION	SIM	SIMILAR	6. THE ACTUAL AREA(S) OF WORK SHALL BE
	ALTERNATE	FBN	FLIP BENCH	MTD	MOUNTED	SND	SANITARY NAPKIN DISPOSAL	REQUIRED TO PROPERLY EXECUTE THE C
M / AL	ALUMINUM	FBO	FURNISHED BY OWNER	MTL	METAL	SNV	SANITARY NAPKIN VENDOR	EXISTING DIMENSIONS AND HATCHED ARE DOCUMENTS ARE FOR GENERAL REFEREN
D	ANODIZED	FCO	FLOOR CLEAN OUT	MU	MECHANICAL UNIT	SPEC	SPECIFICATION	ONLY.
	AREA OF REFUGE	EE .	FLOOR DRAIN FIRE EXTINGUISHER	MVV	MICROWAVE	SPM	SINGLE PLY MEMBRANE	7. PRIOR TO BIDDING, THE TRADE CONTRACT
ROX	ACCESS PANEL APPROXIMATELY	FFC	FIRE EXTINGUISHER CABINET	MWL	METAL WARDROBE LOCKER MAILBOX UNIT	SQ SS / ST STL	SQUARE STAINLESS STEEL	EXTENT OF WORK REQUIRED TO PROPERL
NUΛ	AREA OF RESCUE ASSISTANCE	FECB	FIRE EXTINGUISHER, CABINET AND BLANKET	NC NC	NOISE CRITERIA	SSF SISIL	STAINLESS STEEL SOLID SURFACE	REQUIREMENTS. ADDITIONAL WORK THAT COULD HAVE BEEN IDENTIFIED DURING BID
Н	ARCHITECTURAL	FF	FACTORY FINISH	NIC	NOT IN CONTRACT	SSG	SILICONE STRUCTURAL GLAZING	THE RESPONSIBLE TRADE CONTRACTOR(S
•	ACOUSTICAL SEALANT	FG	FULL GLASS DOOR	NL	NARROW LIGHT DOOR	ST	SEALANT TAPE	THE OWNER.
	ADJUSTABLE SHOWER HEAD	FG-2	FULL GLASS DOOR - PAIR	NLR	NARROW LIGHT DOOR - RATED	ST	STEEL	THE TRADE CONTRACTORS SHALL BE FAM CONDITIONS AND NOTIFY THE ARCHITECT
	ACOUSTIC WALL PANEL	FH	FULL HEIGHT	NLR-2	NARROW LIGHT DOOR - RATED PAIR	STC	SOUND TRANSMISSION COEFFICIENT	OF ANY CONFLICTS WITH THE CONSTRUCT
	BASE CABINET	FL -	FLUSH LOUVER DOOR	NO	NUMBER	STD	STANDARD	PREPARING SUBMITTALS OR BEGINNING A
	BOTTOM OF	FL-2	FLUSH LOUVER DOOR - PAIR	NOM	NOMINAL	STL	STEEL	THE TRADE CONTRACTORS SHALL PROVID CONSTRUCTION AND/OR SHORING REQUIF
	BIO-BASED TILE	FLR FOF	FLOOR FACE OF FOUNDATION	NTS	NOT TO SCALE	STOR	STORAGE	REQUIREMENTS OF THEIR CONTRACT.
	BOARD	FOM	FACE OF MASONRY	OA	OVERALL	STRUCT	STRUCTURAL	10. ALL EXTERIOR OPENINGS SHALL BE SECUI
	BOTTLE FILLER BLOCKING	FOS	FACE OF STUD	OCD	ON CENTER OVERHEAD COILING DOOR	STV	STONE THRESHOLD STOVE	IS NOT BEING PERFORMED. THE TRADE C
	BY OWNER	FOW	FACE OF WALL	OD	OUTSIDE DIAMETER	SUSP	SUSPENDED	REMOVE EXISTING DOORS, FRAMES, WIND REPLACEMENTS ARE ONSITE AND READY F
	BRONZE	FT	FOOT / FEET	OH	OPPOSITE HAND	SV	SHEET VINYL	INSTALLATION OF DOORS, FRAMES, WINDO
	BOTH SIDES	GA	GAUGE	OPNG	OPENING	T	TREAD	COMPLETED BY THE END OF THE WORK DA
Т	BASEMENT	GALV	GALVANIZED	OPP	OPPOSITE	T	TALL STORAGE CABINET	CONTRACTORS SHALL PROVIDE TEMPORA CONSTRUCTION AS REQUIRED TO SECURE
	CATCH BASIN	GAS	GAS METER AND REGULATOR	ORD	OVERFLOW ROOF DRAIN	T/	TOP OF	SATISFACTION OF THE OWNER AND RESTO
	CORNICE DRAIN	GB	GRAB BAR	OSB	ORIENTED STRAND BOARD	TB#	TACKBOARD (# DENOTES WIDTH; REFER TO	THEIR ORIGINAL CONDITION.
	CORNER GUARD	GC	GENERAL CONTRACTOR	OSD	OPEN SITE DRAIN		INTERIOR ELEVATIONS FOR MOUNTING HEIGHTS)	11. PATCHING, REPAIRING, AND REFINISHING
	COAT HOOK	GL DLY	GLASS PLOCK	P	PHONE OUTLET	TBR	TOWEL BAR	THOSE REGULARLY INVOLVED IN THAT TRA
	CONTROL JOINT	GL BLK GLZ	GLASS BLOCK GLAZING	PART	PARTITION	IC TD	TOILET COMPARTMENT TRENCH DRAIN	MATERIAL, FINISH, COLOR, TEXTURE AND S
	CENTER LINE	GRND	GROUND	PATT	PATTERN	TEI	TELEPHONE	CONTRACT DRAWINGS FOR EXISTING BUIL
	CEILING CLEAR(ANCE)	GWB	GYPSUM WALL BOARD	PCO	PRECAST CONCRETE POLISHED CONCRETE	TFF	TOP OF FINISH FLOOR	REMAIN. 12. TRADE CONTRACTORS SHALL PROTECT THE
	CONCRETE MASONRY UNIT	GYP	GYPSUM	PI	PROPERTY LINE	THK	THICK	CONSTRUCTION, FINISHES, AND EQUIPMEN
R	COUNTER	НВ	HOSE BIBB	PLAM	PLASTIC LAMINATE	TP	TOILET PAPER	DAMAGE. ANY WORK AND/OR EXISTING FILE
	CLEAN OUT	HD	ELECTRIC HAND DRYER	PLWD	PLYWOOD	TPD	TOILET PAPER DISPENSER	DURING THE REMOVAL OF EXISTING WORK WORK SHALL BE REPAIRED, REPLACED, AN
	COLUMN	HDS	HIGH DENSITY STORAGE	PNT	PAINT	TPO	THERMOPLASTIC OLEFIN	RESPONSIBLE TRADE CONTRACTOR TO MA
С	CONCRETE	HDWR	HARDWARE	PR	PAIR	TRZ	TERRAZZO	AT NO ADDITIONAL COST TO THE OWNER A
ST	CONSTRUCTION	HG	HALF GLASS DOOR	PREFAB	PREFABRICATED		TACK STRIP (# DENOTES WIDTH; REFER TO INTERIOR ELEVATIONS FOR MOUNTING HEIGHTS)	THE OWNER AND ARCHITECT. 13. THE ARCHITECT SHALL REVIEW AND APPR
TD	CONTINUOUS	HG-2	HALF GLASS DOOR PAIR HOLLOW METAL	PSE	MOTORIZED PROJECTION SCREEN	— _{TV}	TELEVISION	JUNCTION BOXES AND RACEWAYS PRIOR
TR	CONTRACTOR	HORIZ	HORIZONTAL	PSF	POUNDS PER SQUARE FOOT	TYP	TYPICAL	CABLING.
R	CORRIDOR CENTER POINT	HP	HIGH POINT	PSI PSM	POUNDS PER SQUARE INCH MANUAL PROJECTION SCREEN	UC	UNDER COUNTER	14. EXISTING SITE FEATURES, MATERIALS, AM DAMAGED BY CONSTRUCTION OPERATION
	CARPET (BROADLOOM)	HPC	HIGH PERFORMANCE COATING	PT	PORCELAIN TILE	UNO	UNLESS NOTED OTHERWISE	REPAIRED, OR REPLACED BY THE RESPON
Τ	CARPET (IBROADLOOM)	HR	HOUR	PTB	PORCELAIN TILE BASE	UR	URINAL	AT NO ADDITIONAL COST TO THE OWNER A
	CARD READER	HT	HEIGHT	PTD	PAPER TOWEL DISPENSER	US	URINAL SCREEN	THE OWNER AND ARCHITECT.
	CERAMIC TILE	HVAC	HEATING, VENTILATION, AIR CONDITIONING	PTD	PAINTED	VB	VAPOR BARRIER	15. CONTRACTOR SHALL COORDINATE THE W INVOLVED SO THAT THE CONSTRUCTION O
	CERAMIC TILE BASE	HWH	HOT WATER HEATER	PTF	PORCELAIN TILE FLOOR	VB	VINYL BASE	WITHOUT TRADE INTERFERENCE OR WAS
	CERAMIC TILE FLOOR	ID	INSIDE DIAMETER	PTST	PORCELAIN TILE STAIR TREAD	VBFS	RECESSED VOLLYBALL FLOOR SLEEVE	16. WARNING: ASBESTOS-CONTAINING BUILD
1	CERAMIC TILE WALL	INFO	INCH	PTTWS	PORCELAIN TILETACTILE WARNING STRIP	VCT	VOLUME CONTROL VINYL COMPOSITION TILE	PRESENT IN THIS BUILDING. NO PERSON N CONTAINING MATERIALS UNLESS THAT PL
	DATA OUTLET	INFO	INFORMATION INSULATION	PTW	PORCELAIN TILE WALL	VDB	VISUAL DISPLAY BOARD	WORKER OR CONDUCTS SUCH WORK IN A
	DRINKING FOUNTAIN	INT	INSULATION INTERIOR	PVC	POLYVINYL CHLORIDE	VEND	VENDING MACHINE	SPECIFICATIONS(S) CONTAINED IN THE PR
i	DIAMETER DIAGONAL	IPS	INTERIOR INTERIOR PAINT SYSTEM	OT.	QUAD POWER OUTLET QUARRY TILE	VERT	VERTICAL	COMPLIANCE WITH ILLINOIS DEPARTMENT REGULATIONS.
1	DIMENSION	JC	JANITOR'S CLOSET	OTY	QUANTITY	VEST	VESTIBULE	ALGULATIONS.
	DISHWASHER	JT	JOINT	R	RISER	VIF	VERIFY IN FIELD	
	DAYLITE OPENING	КВ	KNOX BOX	RAD	RADIUS	VP	VENT PIPE	
	DOWN	KS	KNEE SPACE	RAL	ROOF LADDER	VT	VINYL TILE	
	DOOR	LAM	LAMINATED	RB	RUBBER BASE	VWC	VINYL WALL COVERING	
	DOWNSPOUT	LAV	LAVATORY	RBST	RUBBER STAIR TREAD	W	WALL CABINET	
	DOMESTIC WATER	LIN	LINOLEUM	RD	ROOF DRAIN	VV/D	WITH	
)	DRAWING	LP	LOW POINT	REF	REFERENCE / REFER TO	W/D W/O	WASHER / DRYER WITHOUT	
	EACH EXPOSED CONSTRUCTION	LIL	LINTEL	REF	REFRIDGERATOR	WC:	WATER CLOSET	
	EXPOSED CONSTRUCTION	LVR	LOUVER LUXURY VINYL TILE	REINF	REINFORCED	WCO	WALL CLEAN OUT	
	EACH FACE	M	MIRROR	REQD RES	REQUIRED RESINOUS FLOORING		WOOD	
	EXHAUST HOOD ELECTRIC HAIR DRYER	MAT'L	MATERIAL	RESB	RESINOUS FLOORING RESINOUS INTEGRAL BASE	WM	WALKOFF MAT	
	EXPANSION JOINT	MAX	MAXIMUM	REV	REVISION	WP	WATERPROOF	
ELEV	ELEVATION	MB#	MARKERBOARD (#DENOTES WIDTH, REFER TO	RF	RUBBER FLOOR	WPNL	WOOD PANEL	
<u> </u>	ELECTRICAL		INTERIOR ELEVATIONS FOR MOUNTING HEIGHTS	RFT	RUBBER FLOOR TILE	WPT	WORK POINT	
-	ENTRANCE MAT SYSTEMS	MCM	METAL COMPOSITION MATERIAL	RM	ROOM	WWF	WELDED WIRE FABRIC	
						YCO	YARD CLEAN OUT	

GENERAL NOTES

- ALL WORK SHALL BE COMPLIANT WITH THE CODES, ORDINANCES, AND REGULATIONS OF THE AUTHORITIES HAVING JURISDICTION OVER THE PROJECT LOCATION. THE TRADE CONTRACTORS' PERSONNEL SHALL NOT BE ALLOWED ON THE
- WHERE CONFLICTS EXIST WITHIN OR BETWEEN PARTS OF THE CONTRACT DOCUMENTS, OR BETWEEN THE CONTRACT DOCUMENTS AND APPLICABLE STANDARDS, CODES, ORDINANCES, AND REGULATIONS THE MORE STRINGENT OR HIGH QUALITY OR GREATER QUALITY REQUIREMENT(S) SHALL APPLY. LARGE-SCALE DRAWINGS TAKE PRECEDENCE OVER SMALL SCALE DRAWINGS; FIGURED DIMENSIONS TAKE PRECEDENCE OVER SCALED DIMENSIONS; AND NOTED MATERIALS TAKE PRECEDENCE OVER GRAPHIC REPRESENTATIONS.

PROJECT SITE WITHOUT COMPLYING WITH THE OWNER'S SECURITY

THE CONTRACT DOCUMENTS IDENTIFY THE MINIMUM AMOUNT OF WORK REQUIRED. TRADE CONTRACTORS SHALL PROVIDE THE EXTENT OF WORK NECESSARY FOR A COMPLETE INSTALLATION. REFER TO THE PROJECT MANUAL FOR PRODUCTS, MATERIALS, AND PROCEDURES NOT IDENTIFIED ON THE CONTRACT DRAWINGS.

THE ACTUAL AREA(S) OF WORK SHALL BE KEPT TO THE MINIMUM

- REQUIRED TO PROPERLY EXECUTE THE CONTRACT REQUIREMENTS. EXISTING DIMENSIONS AND HATCHED AREAS INDICATED ON CONTRACT DOCUMENTS ARE FOR GENERAL REFERENCE AND BIDDING PURPOSES PRIOR TO BIDDING, THE TRADE CONTRACTORS SHALL FIELD VERIFY THE EXTENT OF WORK REQUIRED TO PROPERLY EXECUTE THE CONTRACT
- REQUIREMENTS. ADDITIONAL WORK THAT IS REQUIRED, WAS VISIBLE, AND COULD HAVE BEEN IDENTIFIED DURING BIDDING SHALL BE COMPLETED BY THE RESPONSIBLE TRADE CONTRACTOR(S) AT NO ADDITIONAL COST TO THE OWNER. THE TRADE CONTRACTORS SHALL BE FAMILIAR WITH THE EXISTING
- CONDITIONS AND NOTIFY THE ARCHITECT OR CONSTRUCTION MANAGER OF ANY CONFLICTS WITH THE CONSTRUCTION DOCUMENTS PRIOR TO PREPARING SUBMITTALS OR BEGINNING ANY WORK. . THE TRADE CONTRACTORS SHALL PROVIDE ALL TEMPORARY CONSTRUCTION AND/OR SHORING REQUIRED TO PROPERLY EXECUTE THE
- REQUIREMENTS OF THEIR CONTRACT. 0. ALL EXTERIOR OPENINGS SHALL BE SECURED AT ALL TIMES WHEN WORK IS NOT BEING PERFORMED. THE TRADE CONTRACTORS SHALL NOT REMOVE EXISTING DOORS, FRAMES, WINDOWS. ETC. UNTIL REPLACEMENTS ARE ONSITE AND READY FOR INSTALLATION. IF INSTALLATION OF DOORS, FRAMES, WINDOWS, ETC. CANNOT BE COMPLETED BY THE END OF THE WORK DAY, THE RESPONSIBLE TRADE CONTRACTORS SHALL PROVIDE TEMPORARY WEATHERPROOF CONSTRUCTION AS REQUIRED TO SECURE THE BUILDING TO THE

SATISFACTION OF THE OWNER AND RESTORE AFFECTED SURFACES TO

- THEIR ORIGINAL CONDITION. PATCHING, REPAIRING, AND REFINISHING WORK SHALL BE PERFORMED BY THOSE REGULARLY INVOLVED IN THAT TRADE AND SHALL MATCH THE EXISTING ADJACENT CONSTRUCTION AS CLOSELY AS POSSIBLE IN MATERIAL, FINISH, COLOR, TEXTURE AND SHEEN. REFER TO THE CONTRACT DRAWINGS FOR EXISTING BUILDING CONSTRUCTION TO
- 2. TRADE CONTRACTORS SHALL PROTECT THEIR WORK AND EXISTING CONSTRUCTION, FINISHES, AND EQUIPMENT TO REMAIN TO PREVENT DAMAGE. ANY WORK AND/OR EXISTING FINISHES TO REMAIN DAMAGED DURING THE REMOVAL OF EXISTING WORK OR THE INSTALLATION OF NEW WORK SHALL BE REPAIRED, REPLACED, AND REFINISHED BY THE RESPONSIBLE TRADE CONTRACTOR TO MATCH THE ORIGINAL CONDITION AT NO ADDITIONAL COST TO THE OWNER AND TO THE SATISFACTION OF
- THE OWNER AND ARCHITECT. B. THE ARCHITECT SHALL REVIEW AND APPROVE LOCATIONS FOR ALL JUNCTION BOXES AND RACEWAYS PRIOR TO INSTALLATION OF WIRING / 4. EXISTING SITE FEATURES, MATERIALS, AMENITIES, LANDSCAPING, ETC. DAMAGED BY CONSTRUCTION OPERATIONS SHALL BE RESTORED, REPAIRED, OR REPLACED BY THE RESPONSIBLE TRADE CONTRACTOR(S)
- AT NO ADDITIONAL COST TO THE OWNER AND TO THE SATISFACTION OF THE OWNER AND ARCHITECT. **15.** CONTRACTOR SHALL COORDINATE THE WORK WITH ALL PARTIES INVOLVED SO THAT THE CONSTRUCTION CAN PROCEED SMOOTHLY, WITHOUT TRADE INTERFERENCE OR WASTE OF TIME AND MATERIAL. S. WARNING: ASBESTOS-CONTAINING BUILDING MATERIALS ARE OR MAY BE PRESENT IN THIS BUILDING. NO PERSON MAY DISTURB ASBESTOS-

WORKER OR CONDUCTS SUCH WORK IN ACCORDANCE WITH

CONTAINING MATERIALS UNLESS THAT PERSON IS A LICENSED ASBESTOS

SPECIFICATIONS(S) CONTAINED IN THE PROJECT DOCUMENTS AND IN

COMPLIANCE WITH ILLINOIS DEPARTMENT OF HEALTH RULES AND

GENERAL REFLECTIVE CEILING NOTES

- FLOOR UNLESS NOTED OTHERWISE. TECHNOLOGY DRAWINGS FOR CEILING MOUNTED EQUIPMENT AND COMPONENTS NOT IDENTIFIED ON ARCHITECTURAL DRAWINGS. B. IN AREAS WITH NO FINISHED CEILING SYSTEM REFER TO ELECTRICAL DRAWINGS FOR LUMINARIES AND SPACING.
- PROVIDED: C. CEILING HUNG WINDOW TREATMENTS DRAWN AND NOTED. NOT MATCH QUANTITY AND/OR SPACING OF LIGHT FIXTURES ON ARCHITECTURAL DRAWINGS. THE CORRIDOR UNLESS NOTED OTHERWISE.

3. ALL CEILING TILES SHALL BE TYPE 1 UNLESS NOTED OTHERWISE:

A. PROVIDE TYPE 2 CEILING TILES IN TOILET ROOMS.

. PAINT ALL GYPSUM CEILINGS

GENERAL CONSTRUCTION / RENOVATION NOTES AFTER REMOVAL OF ITEMS IDENTIFIED TO BE REMOVED, CLEAN AND REPAIR THE EXISTING SURFACES TO REMAIN TO MATCH THE CONSTRUCTION MATERIALS AND METHODS. FINISHES TEXTURE. PATTERN.

FINISHED CEILING ELEVATION

EXPOSED CEILING

DEPARTMENT

SMOKE DETECTOR

DAYLIGHT SENSOR

SECURITY CAMERA

WIRELESS ACCESS POINT

MATERIAL PATTERN LEGEND

SURFACE PATTERNS

LINE TYPES

UNIT / BLOCK

CONCRETE

GYPSUM BOARD

METAL MESH

WARNING PAD

BEYOND

— - — - — CENTER, GRID — — — DEMOLITION

---- HIDDEN

■ ■ ■ MATCHLINE

NEW (CUT)

---- OVERHEAD

AV SPEAKERS

ALUMINUM

CONCRETE

UNIT / BLOCK

UNDISTURBED

EARTH - TOP SOIL /

GYPSUM BOARD

PLASTIC LAMINATE

FARTH -

BACKFILL

GRAVEL

GROUT

PLYWOOD

INSULATION

SPRAY FOAM

INSULATION

SOLID SURFACE

RIGID

STEEL

CONCRETE MASONRY

BRICK

CUT PATTERNS

- COLOR AND SHEEN OF THE ADJACENT SURFACES TO REMAIN. PATCH, CLEAN, PREPARE, PAINT, ETC. EXISTING SURFACES AS REQUIRED. WHERE EXISTING EQUIPMENT IS REMOVED AND NEW EQUIPMENT IS SMALLER AND INSTALLED IN THE SAME LOCATION, CLEAN AND REPAIR THE SIGHT-EXPOSED SURFACES TO REMAIN TO MATCH THE CONSTRUCTION MATERIALS AND METHODS, FINISHED TEXTURE, PATTERN, AND COLOR OF THE ADJACENT SURFACES TO REMAIN. PATCH, CLEAN, PREPARE, PAINT, ETC. EXISTING SURFACES AS REQUIRED. . EXISTING AND NEW FIRE RATED ASSEMBLIES ARE TO BE MAINTAINED AND BE IN CONFORMANCE WITH APPLICABLE CODES. PENETRATIONS SHALL BE CONSTRUCTED AND SEALED AS REQUIRED; NEW FIRE RATED ASSEMBLIES SHALL BE INSPECTED, CERTIFIED, AND APPROPRIATELY LABELED ABOVE
- . ALL PENETRATIONS THROUGH ANY MATERIAL SHALL BE SEALED WITH A COMPATIBLE MATERIAL APPROVED BY THE ARCHITECT PRIOR TO INSTALLATION.

JOINTS TO MATCH COLOR, TEXTURE AND PROFILE OF ADJACENT

- 5. MASONRY INFILL AND/OR PATCHING SHALL MATCH THE MATERIAL, SIZE, FINISH, COLOR, TEXTURE AND COURSING OF EXISTING MASONRY TO REMAIN. NEW MASONRY SHALL BE WHOLE UNITS TOOTHED IN TO THE EXISTING MASONRY. NO SAW CUT EDGES WILL BE ALLOWED. MORTAR
- 6. STRUCTURAL LINTELS ARE REQUIRED AT ALL OPENINGS AND RECESSES IN LOAD BEARING AND NON-LOAD BEARING MASONRY WALLS. REFER TO STRUCTURAL DRAWINGS. 7. EXPOSED OUTSIDE CORNERS OF INTERIOR CONCRETE MASONRY UNITS SHALL BE ROUNDED, U.N.O.
 - 3. PROVIDE A CONTINUOUS BEAD OF SEALANT BETWEEN DISSIMILAR MATERIALS, U.N.O. 9. PROVIDE GALVANIC PROTECTION SEPARATING DISSIMILAR METALS. 10. ALL EXPOSED PIPING AND CONDUIT SHALL BE KEPT AS CLOSE AS

11. ALL WALLS ABOVE DOORS/FRAMES TO EXTEND TO UNDERSIDE OF DECK,

POSSIBLE TO WALLS STRUCTURE, AND FLOOR/ROOF DECK.

12. ALL EXTERIOR DIMENSIONS ARE TO THE OUTSIDE FACE OF FINISH MATERIAL, U.N.O. 13. SLOPE ALL CONCRETE AND/OR TOPPING TO FLOOR DRAINS; COORDINATE WITH PLUMBING DRAWINGS. 14. CENTER SPRINKLER HEADS AND LIGHT FIXTURES, SECURITY DEVICES, WAP'S, EXIT SIGNS, & SIMILAR DEVICES IN ACT TILES, U.N.O.

GENERAL FINISH NOTES


15. INSTALL WOOD BLOCKING AS NEEDED FOR ALL WALL MOUNTED ITEMS.


- I. EXISTING SIGHT-EXPOSED SURFACES OF EXISTING PARTITIONS AND SOFFITS SHALL BE FINISH PAINTED. 2. ALL NEW CONSTRUCTION AND IDENTIFIED EXISTING CONSTRUCTION TO REMAIN SHALL BE PRIME AND FINISH PAINTED UNLESS MATERIALS ARE PRE-FINISHED. REFER TO THE FINISH PLANS AND THE PROJECT MANUAL FOR ADDITIONAL INFORMATION. NEW PARTITIONS AND SOFFITS ARE TO BE PRIME PAINTED FOR FULL HEIGHT OF PARTITION OR SOFFIT. SIGHT-EXPOSED SURFACES OF NEW PARTITIONS AND SOFFITS ARE TO BE FINISH
- . ALL WALLS IN EXISTING ROOMS IN WHICH WORK IS OCCURRING: A. REPAIR HOLES, DEFECTS, ETC. IN EXISTING PLASTER AND
- CONCRETE BLOCK WALLS; B. AT REPAIRS AND UNPAINTED CONCRETE BLOCK PROVIDE BLOCK FILL PAINT AND TWO FINISH COATS OF PAINT; AND

C. PROVIDE ONE FINISH COAT OF PAINT OVER EXISTING PAINTED

. IN OCCUPIED SPACES IN AREAS OF RENOVATION, ALL SIGHT-EXPOSED MEPFP COMPONENTS INCLUDING, BUT NOT LIMITED TO, DUCTWORK, PIPING, FITTINGS, CONDUIT, BOXES, HANGERS, ETC SHALL BE PAINTED. DO NOT PAINT MOVING PARTS OR LABELS. 5. DO NOT PAINT EXISTING FACE BRICK, GROUND FACE CMU OR SGFT, UNO.

- ALL CEILING ELEVATIONS IDENTIFIED DENOTE HEIGHT ABOVE FINISHED REFER TO MECHANICAL, PLUMBING, ELECTRICAL, FIRE PROTECTION, AND
- 4. REFER TO FINISH PLANS FOR ADDITIONAL INFORMATION REGARDING: A. PAINTING OF CEILING COMPONENTS; B. SUSPENDED ACOUSTICAL TILE CEILING SYSTEM TYPES TO BE
- PRIOR TO BEGINNING ANY WORK, NOTIFY THE ARCHITECT IF EXISTING CONDITIONS PREVENT NEW CEILING SYSTEMS FROM BEING INSTALLED AS PRIOR TO BEGINNING ANY WORK, NOTIFY THE ARCHITECT IF QUANTITY AND/OR SPACING OF LIGHT FIXTURES ON ELECTRICAL DRAWINGS DOES . LIGHT FIXTURES IN CORRIDORS ARE TO BE CENTERED IN THE WIDTH OF

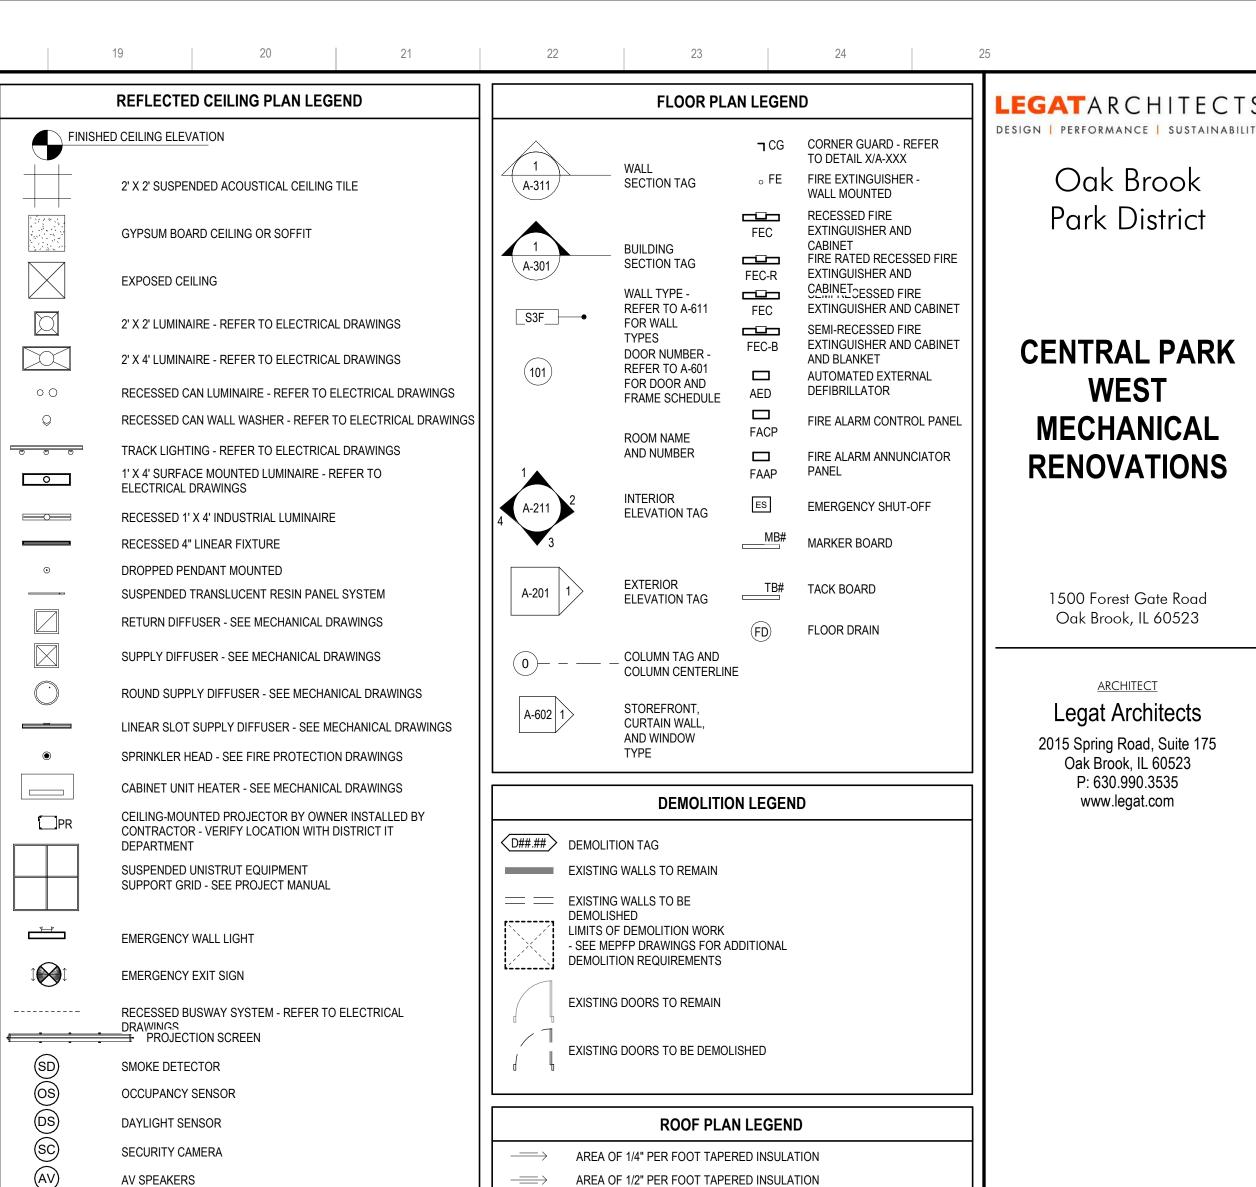

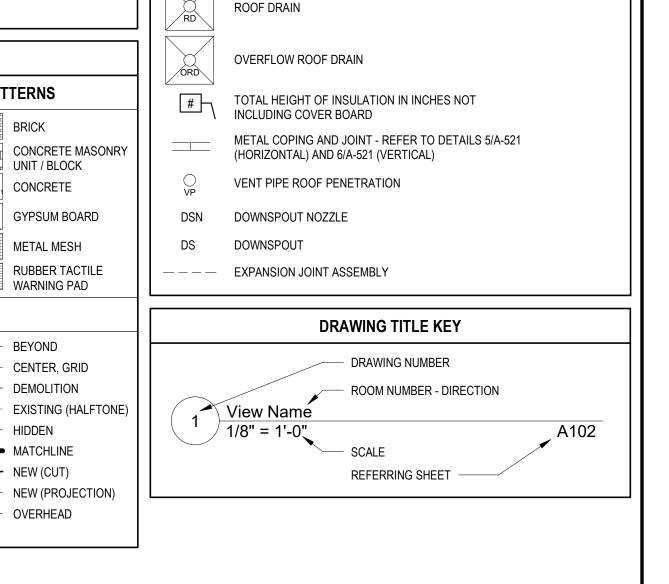

SIGNATURE REVISIONS

DESCRIPTION DATE

220005.00

11.22.19

CENTRAL PARK

RENOVATIONS

1500 Forest Gate Road

Oak Brook, IL 60523

<u>ARCHITECT</u>

Legat Architects

2015 Spring Road, Suite 175

Oak Brook, IL 60523

P: 630.990.3535

www.legat.com

PROJECT NUMBER

DATE OF ISSUE

SYMBOLS AND PROJECT GENERAL NOTES

ISSUED FOR BIDDING

