

Oak Brook Park District


CENTRAL PARK WEST - DOOR AND WINDOW REPLACEMENT

1500 Forest Gate Road

Oak Brook, IL 60523



SITE LOCATION MAP

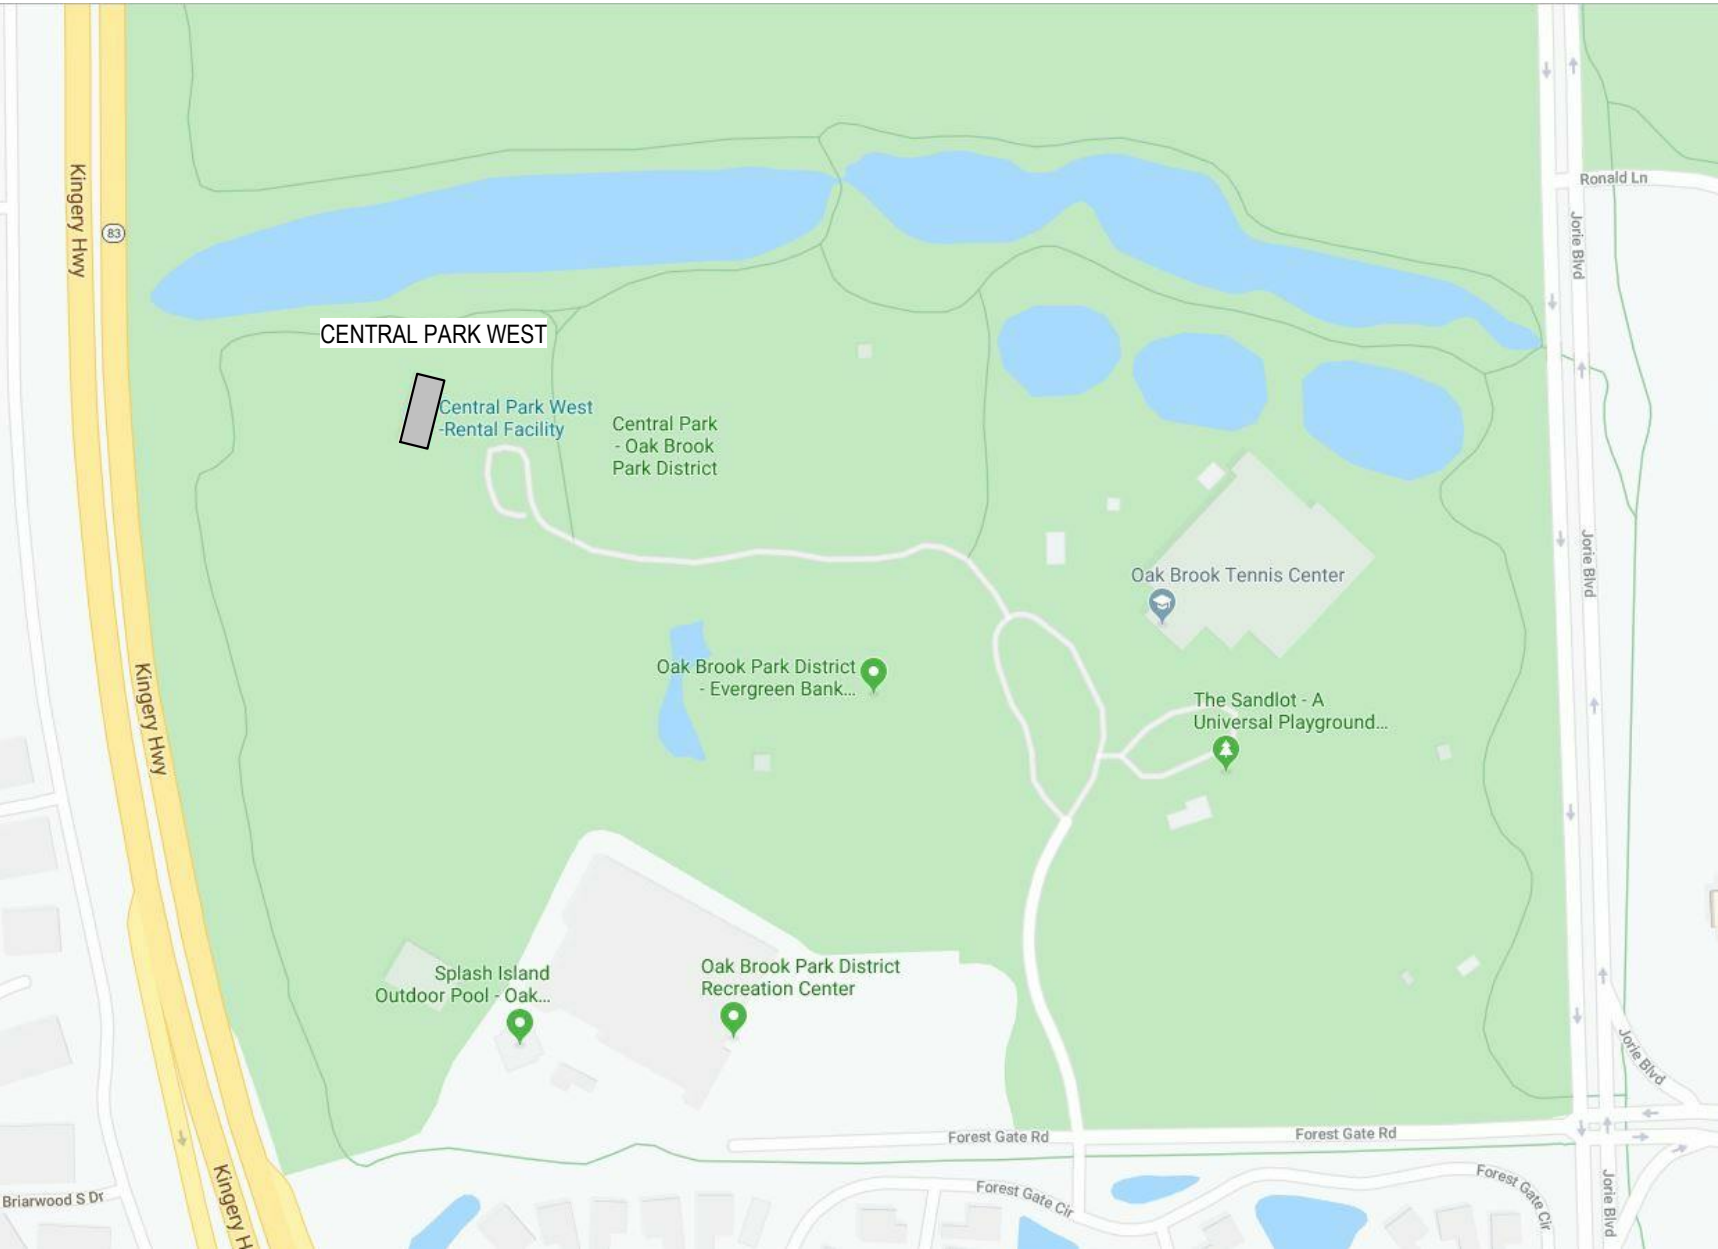

Oak Brook
Park District

CENTRAL PARK
WEST - DOOR
AND WINDOW
REPLACEMENT

1500 Forest Gate Road
Oak Brook, IL 60523

ARCHITECT
Legat Architects
2015 Spring Road, Suite 175
Oak Brook, IL 60523
P: 630.990.3535
www.legat.com
www.legat.com

SCHEDULE OF DRAWINGS

GENERAL DRAWINGS
G-001.2 TITLE SHEET
G-201.2 SYMBOLS AND PROJECT GENERAL NOTES

ARCHITECTURAL DRAWINGS
A-101.2 FIRST FLOOR PLAN, DOOR / FRAME SCHEDULE, DOOR / FRAME TYPES AND DETAILS

BOARD OF COMMISSIONERS

SHARON KNITTER, President
TOM TRUEDSON, Vice President
LARA SULEIMAN, Commissioner
FRANK TROMBETTA, Commissioner
KEVIN TAN, Treasurer

RELEASE

ISSUED FOR BIDDING

DATE OF ISSUE

02.21.2020

ARCHITECT'S PROJECT NUMBER

220005.00

SIGNATURE
DATE

REVISIONS

NO.	DESCRIPTION	DATE

PROJECT NUMBER
DATE OF ISSUE
DRAWN BY
CHECKED BY

220005.00
02.21.2020
TW
TH

TITLE SHEET

G-001.2
ISSUED FOR BIDDING

<

LEGATARCHITECTS
DESIGN | PERFORMANCE | SUSTAINABILITY

Oak Brook
Park District

CENTRAL PARK WEST - DOOR AND WINDOW REPLACEMENT

1500 Forest Gate Road
Oak Brook, IL 60523

ARCHITECT

Legat Architects








2015 Spring Road, Suite 175
Oak Brook, IL 60523
P: 630.990.3535
www.legat.com

FLOOR PLAN LEGEND

	WALL SECTION TAG		CORNER GUARD - REFER TO DETAIL XA-XXX
	BUILDING SECTION TAG		FIRE EXTINGUISHER - WALL MOUNTED
	WALL TYPE - REFER TO A-811 FOR WALL TYPES		RECESSED FIRE EXTINGUISHER AND CABINET
	DOOR NUMBER - REFER TO A-801 FOR DOOR AND FRAME SCHEDULE		FIRE RATED RECESSED FIRE EXTINGUISHER AND CABINET
	INTERIOR ELEVATION TAG		SEMI-RECESSED FIRE EXTINGUISHER AND CABINET
	EXTERIOR ELEVATION TAG		AUTOMATED EXTERNAL DEFIBRILLATOR
	COLUMN TAG AND COLUMN CENTERLINE		FIRE ALARM CONTROL PANEL
	STOREFRONT, CURTAIN WALL, AND WINDOW TYPE		FIRE ALARM ANNUNCIATOR PANEL
			EMERGENCY SHUT-OFF
			MARKER BOARD
			TACK BOARD
			FLOOR DRAIN

DEMOLITION LEGEND

	DEMOLITION TAG
	EXISTING WALLS TO REMAIN
	EXISTING WALLS TO BE DEMOLISHED
	LIMITS OF DEMOLITION WORK - SEE MEPPF DRAWINGS FOR ADDITIONAL DEMOLITION REQUIREMENTS
	EXISTING DOORS TO REMAIN
	EXISTING DOORS TO BE DEMOLISHED

ROOF PLAN LEGEND	
	AREA OF 1/4" PER FOOT TAPERED INSULATION
	AREA OF 1/2" PER FOOT TAPERED INSULATION
	ROOF DRAIN
	OVERFLOW ROOF DRAIN
	TOTAL HEIGHT OF INSULATION IN INCHES NOT INCLUDING COVER BOARD
	METAL COPING AND JOINT - REFER TO DETAILS 5/A-521 (HORIZONTAL) AND 5/A-521 (VERTICAL)
	VENT PIPE ROOF PENETRATION
DSN	DOWNSPOUT NOZZLE
DS	DOWNSPOUT
----	EXPANSION JOINT ASSEMBLY

DRAWING TITLE KEY

DRAWING NUMBER

ROOM NUMBER - DIRECTION

View Name

SCALE

REFERRING SHEET

1

1/8" = 1'-0"

A102

GENERAL CONSTRUCTION / RENOVATION NOTES	
1.	AFTER REMOVAL OF ITEMS IDENTIFIED TO BE REMOVED, CLEAN AND REPAIR THE EXISTING SURFACES TO REMAIN TO MATCH THE EXISTING MATERIALS. FINISHES, FINISHES, FINISHES, FINISHES, PATTERN, COLOR AND SHEEN OF THE ADJACENT SURFACES TO REMAIN, PATCH, CLEAN, PREPARE, PAINT, ETC. EXISTING SURFACES AS REQUIRED.
2.	WHERE EQUIPMENT OR MATERIALS ARE IDENTIFIED TO BE REMOVED, IT IS SMALLER AND INSTALLED IN THE SAME LOCATION, CLEAN AND REPAIR THE SIGHT-EXPOSED SURFACES TO REMAIN TO MATCH THE CONSTRUCTION MATERIALS. FINISHES, FINISHES, FINISHES, FINISHES, PATTERN, AND COLOR OF THE ADJACENT SURFACES TO REMAIN, PATCH, CLEAN, PREPARE, PAINT, ETC. EXISTING SURFACES AS REQUIRED.
3.	EXISTING MATERIALS AND FINISHES ARE TO BE MAINTAINED AND BE IN CONFORMANCE WITH APPLICABLE CODES. PENETRATIONS SHALL BE CONSTRUCTED AND SEALED AS REQUIRED. NEW FIRE RATED ASSEMBLY SHALL BE INSPECTED, CERTIFIED, AND APPROPRIATELY LABELED ABOVE CEILINGS.
4.	ALL PENETRATIONS THROUGH ANY MATERIAL SHALL BE SEALED WITH A JOINTABLE MATERIAL APPROVED BY THE ARCHITECT PRIOR TO INSTALLATION.
5.	MASONRY INFLU AND/OR PATCHING SHALL MATCH THE MATERIAL, SIZE, COLOR, AND FINISH OF THE EXISTING MASONRY. MASONRY TO REMAIN, NEW MASONRY SHALL BE WHOLE UNITS TOOTHED IN TO THE EXISTING MASONRY. NO SAW CUT EDGES WILL BE ALLOWED. MORTAR JOINTS TO MATCH COLOR, TEXTURE AND PROFILE OF ADJACENT MASONRY.
6.	STRUCTURAL LINTELS ARE REQUIRED AT ALL OPENINGS AND RECESSES IN LOAD BEARING AND NON-LOAD BEARING MASONRY WALLS. REFER TO STRUCTURAL DRAWINGS.
7.	EXPOSED OUTSIDE CORNERS OF INTERIOR CONCRETE MASONRY UNITS SHALL BE ROUNDED. U.O.
8.	PROVIDE FINISHES BEAD OF SEALANT BETWEEN DISSIMILAR MATERIALS, U.O.
9.	PROVIDE GALVANIC PROTECTION SEPARATING DISSIMILAR METALS. U.O.
10.	EXISTING PIPING AND CONDUIT SHALL BE KEPT AS CLOSE AS POSSIBLE TO WALLS STRUCTURE, AND FLOOR/CEILING. U.O.
11.	ALL WALLS ABOVE DOORS/FRAMES TO EXTEND TO UNDERSIDE OF DECK, U.O.
12.	ALL EXTERIOR DIMENSIONS ARE TO THE OUTSIDE FACE OF FINISH MATERIAL, U.O.
13.	SLOPE ALL CONCRETE AND/OR TOPPING TO FLOOR DRAINS, COORDINATE WITH PLUMBING DRAWINGS.
14.	CENTER SPRINKLER HEADS AND LIGHT FIXTURES, SECURITY DEVICES, WASH EXITS, A SIMILAR FACE HEIGHT OF PARTITION OR SOFT, SIGHT-EXPOSED SURFACES OF NEW PARTITIONS AND SOFFITS ARE TO BE FINISH PAINTED.
15.	INSTALL WALL BLOCKING AS NEEDED FOR ALL WALL MOUNTED ITEMS.
GENERAL FINISH NOTES	
1.	EXISTING SIGHT-EXPOSED SURFACES OF EXISTING PARTITIONS AND SOFFITS SHALL BE FINISH PAINTED.
2.	ALL NEW CONSTRUCTION AND IDENTIFIED EXISTING CONSTRUCTION TO MATCH THE EXISTING FINISHES. FINISHES, FINISHES, FINISHES, FINISHES, PRE-FINISHED. REFER TO THE FINISH PLANS AND THE PROJECT MANUAL FOR ADDITIONAL INFORMATION. NEW PARTITIONS AND SOFFITS ARE TO BE FINISH PAINTED FOR FULL HEIGHT OF PARTITION OR SOFT, SIGHT-EXPOSED SURFACES OF NEW PARTITIONS AND SOFFITS ARE TO BE FINISH PAINTED.
3.	ALL MATERIALS IN EXISTING ROOMS IN WHICH WORK IS OCCURRING ARE TO BE MAINTAINED, REPAIR Holes, DEFECTS, ETC. IN EXISTING PLASTER AND CONCRETE BLOCK WALLS.
4.	EXISTING SURFACES AND UNDERLAY CONCRETE BLOCK PROVIDE BLOCK FINISH AND TWO FINISH COATS OF PAINT, AND
5.	PROVIDE ONE FINISH COAT OF PAINT OVER EXISTING PAINTED ARCHITECTURAL DRAWINGS.
6.	IN OCCUPIED SPACES IN AREAS OF RENOVATION, ALL SIGHT-EXPOSED MEPP COMPONENTS INCLUDING, BUT NOT LIMITED TO, DUCTWORK, WASH EXITS, A SIMILAR FACE HEIGHT OF PARTITION OR SOFT, SIGHT-EXPOSED SURFACES OF NEW PARTITIONS AND SOFFITS ARE TO BE FINISH PAINTED. DO NOT PAINT MOVING PARTS OR LABELS.
7.	DO NOT PAINT EXISTING FACE BRICK, GROUND FACE CMU OR SOFT, UNO.
GENERAL REFLECTIVE CEILING NOTES	
1.	ALL CEILING ELEVATIONS IDENTIFIED DENOTE HEIGHT ABOVE FINISHED FLOOR UNLESS NOTED OTHERWISE.
2.	REFER TO MECHANICAL, PLUMBING, ELECTRICAL, FIRE PROTECTION, AND OTHER DRAWINGS FOR EQUIPMENT MOUNTED EQUIPMENT AND COMPONENTS NOT IDENTIFIED ON ARCHITECTURAL DRAWINGS.
3.	IN AREAS WITH NO FINISHED CEILING SYSTEM REFER TO ELECTRICAL DRAWINGS FOR LIGHT FIXTURES.
4.	REFER TO FINISH PLANS FOR ADDITIONAL INFORMATION REGARDING:
A.	PAINTING OF CEILING COMPONENTS.
B.	REFLECTED ACoustical TILES AND LIGHT SYSTEM TYPES TO BE PROVIDED.
5.	C. CEILING HUNG WINDOW TREATMENTS.
6.	PRIOR TO BEGINNING ANY WORK, NOTIFY THE ARCHITECT IF EXISTING CONDITIONS PREVENT NEW CEILING SYSTEMS FROM BEING INSTALLED AS DRAWN AND NOTED.
7.	PROVIDE ALL NEW CEILING, NOTIFY THE ARCHITECT IF QUANTITY AND/OR SPACING OF LIGHT FIXTURES ON ELECTRICAL DRAWINGS DOES NOT MATCH QUANTITY AND/OR SPACING OF LIGHT FIXTURES ON ARCHITECTURAL DRAWINGS.
8.	LIGHT FIXTURES IN CORRIDORS ARE TO BE CENTERED IN THE WIDTH OF THE CORRIDOR UNLESS NOTED OTHERWISE.
9.	ALL CEILING TILES SHALL BE 2' X 2' UNLESS NOTED OTHERWISE:
A.	GYPSUM TYPE 2 CEILING TILES IN TOILET ROOMS.
9.	PAINT ALL CEILING CEILING

REFLECTED CEILING PLAN LEGEND	
	FINISHED CEILING ELEVATION
	2 X 2 SUSPENDED ACOUSTICAL CEILING TILE
	GYPSUM BOARD CEILING OR SOFFIT
	EXPOSED CEILING
	2 X 2 LUMINAIRE - REFER TO ELECTRICAL DRAWINGS
	2 X 4 LUMINAIRE - REFER TO ELECTRICAL DRAWINGS
	RECESSED CAN LUMINAIRE - REFER TO ELECTRICAL DRAWINGS
	RECESSED CAN WALL WASHER - REFER TO ELECTRICAL DRAWINGS
	TRACK LIGHTING - REFER TO ELECTRICAL DRAWINGS
	1' X 4' SURFACE MOUNTED LUMINAIRE - REFER TO ELECTRICAL DRAWINGS
	RECESSED 1' X 4' INDUSTRIAL LUMINAIRE
	RECESSED 4' LINEAR FIXTURE
	DROPPED PENDANT MOUNTED
	SUSPENDED TRANSLUCENT RESIN PANEL SYSTEM
	RETURN DIFFUSER - SEE MECHANICAL DRAWINGS
	SUPPLY DIFFUSER - SEE MECHANICAL DRAWINGS
	ROUND SUPPLY DIFFUSER - SEE MECHANICAL DRAWINGS
	LINEAR SLOT SUPPLY DIFFUSER - SEE MECHANICAL DRAWINGS
	SPRINKLER HEAD - SEE FIRE PROTECTION DRAWINGS
	CABINET UNIT HEATER - SEE MECHANICAL DRAWINGS
	CEILING-MOUNTED PROJECTOR BY OWNER INSTALLED BY CONTRACTOR - VERIFY LOCATION WITH DISTRICT IT DEPARTMENT
	SUSPENDED UNISTRUT EQUIPMENT SUPPORT GRID - SEE PROJECT MANUAL
	EMERGENCY WALL LIGHT
	EMERGENCY EXIT SIGN
	RECESSED BUSWAY SYSTEM - REFER TO ELECTRICAL DRAWINGS
	PROJECTION SCREEN
	SMOKE DETECTOR
	OCCUPANCY SENSOR
	DAYLIGHT SENSOR
	SECURITY CAMERA
	AV SPEAKERS
	WIRELESS ACCESS POINT

MATERIAL PATTERN LEGEND	
CUT PATTERNS	SURFACE PATTERNS
	LINE TYPES BEYOND CENTER, GRID DEMOLITION EXISTING (HALF-TONE) HIDDEN MATCHLINE NEW (CUT) NEW (PROJECTION) OVERHEAD

GENERAL NOTES

1. ALL WORK SHALL BE IN COMPLIANCE WITH THE CODES, ORDINANCES, AND REGULATIONS OF THE AUTHORITY HAVING JURISDICTION OVER THE PROJECT.
2. THE TRADE CONTRACTORS' PERSONNEL SHALL NOT BE ALLOWED ON THE PROJECT SITE WITHOUT COMPLYING WITH THE OWNER'S SECURITY PROTOCOLS.
3. WHERE CONFLICTS EXIST WITHIN OR BETWEEN PARTS OF THE CONTRACT DOCUMENTS, OR BETWEEN THE CONTRACT DOCUMENTS AND APPLICABLE STANDARDS, SPECIFICATIONS, CODES, ORDINANCES, OR REGULATIONS, THE MORE STRINGENT OR HIGH QUALITY OR GREATER QUALITY REQUIREMENT(S) SHALL APPLY. LARGE-SIZE DRAWINGS TAKE PRECEDENCE OVER SMALL-SIZE DRAWINGS; FIGURED DIMENSIONS TAKE PRECEDENCE OVER UNFIGURED DIMENSIONS; AND NOTED MATERIALS TAKE PRECEDENCE OVER GRAPHIC REPRESENTATIONS.
4. THE CONTRACT DOCUMENTS IDENTIFY THE MINIMUM AMOUNT OF WORK NECESSARY FOR A COMPLETE INSTALLATION.
5. REFER TO THE PROJECT MANUAL, FOR PRODUCTS, MATERIALS, AND METHODS OF CONSTRUCTION, AND FOR CONSTRUCTION DRAWINGS.
6. THE ACTUAL AREA(S) OF WORK SHALL BE KEPT TO THE MINIMUM REQUIRED TO PROPERLY EXECUTE THE CONTRACT REQUIREMENTS.
7. THE CONTRACT DOCUMENTS AND CONSTRUCTION DRAWINGS OF THE CONTRACT DOCUMENTS ARE FOR GENERAL REFERENCE AND BIDDING PURPOSES ONLY.
8. PRIOR TO BIDDING, THE TRADE CONTRACTORS SHALL FIELD VERIFY THE EXTENT OF WORK REQUIRED TO PROPERLY EXECUTE THE CONTRACT REQUIREMENTS. ADDITIONAL WORK THAT IS REQUIRED, WAS VISIBLE, AND COULD HAVE BEEN DEVELOPED FROM THE CONTRACT DOCUMENTS, SHALL BE COMPLETED BY THE RESPONSIBLE TRADE CONTRACTOR(S) AT NO ADDITIONAL COST TO THE OWNER.
9. THE TRADE CONTRACTORS SHALL BE FAMILIAR WITH THE EXISTING CONDITIONS AND NOTIFY THE ARCHITECT OR CONSTRUCTION MANAGER OF ANY CONFLICTS WITH THE CONSTRUCTION DOCUMENTS PRIOR TO PREPARING SUBMITTALS OR BEGINNING ANY WORK.
10. THE TRADE CONTRACTORS SHALL PROVIDE ALL TEMPORARY CONSTRUCTION AND/OR SHORING REQUIRED TO PROPERLY EXECUTE THE REQUIREMENTS OF THE CONTRACT.
11. THE TRADE CONTRACTORS SHALL BE REQUIRED AT ALL TIMES WHEN WORK IS NOT BEING PERFORMED, THE TRADE CONTRACTORS SHALL NOT REMOVE EXISTING DOORS, FRAMES, WINDOWS, ETC. UNTIL THE CONTRACT REQUIREMENTS ARE COMPLETED. IF THE REMOVAL OR INSTALLATION OF DOORS, FRAMES, WINDOWS, ETC. CANNOT BE COMPLETED BY THE END OF THE WORK DAY, THE RESPONSIBLE TRADE CONTRACTOR SHALL PROVIDE TEMPORARY SECURITY TO THE BUILDING UNDER CONSTRUCTION AS REQUIRED TO SECURE THE BUILDING TO THE SATISFACTION OF THE OWNER AND RESTORE AFFECTED SURFACES TO ORIGINAL CONDITION.
12. PATCHING, REPAIRING, AND REFINISHING WORK SHALL BE PERFORMED THOSE REGULARLY INVOLVED IN THAT TRADE AND SHALL MATCH THE EXISTING SURFACES. EXISTING CONSTRUCTION SHALL BE PROTECTED FROM MATERIAL, FINISH, COLOR, TEXTURE, AND SHEEN. REFER TO THE CONTRACT DRAWINGS FOR EXISTING BUILDING CONSTRUCTION TO REMAIN.
13. TRADE CONTRACTORS SHALL PROTECT THEIR WORK AND EXISTING CONSTRUCTION, FINISHES, AND EQUIPMENT TO REMAIN TO PREVENT DAMAGE. ANY WORK AND/OR EXISTING FINISHES TO REMAIN DAMAGED DURING THE COURSE OF THE PROJECT SHALL BE REPAIRED OR NEW WORK SHALL BE REPAIRED, REPLACED, AND REFINISHED BY THE RESPONSIBLE TRADE CONTRACTOR TO MATCH THE ORIGINAL CONDITION AT THE OWNER'S RISK TO THE OWNER AND TO THE SATISFACTION OF THE OWNER AND ARCHITECT.
14. THE ARCHITECT SHALL REVIEW AND APPROVE LOCATIONS FOR ALL JUNCTION BOXES AND RACEWAYS PRIOR TO INSTALLATION OF WIRING / CABLEING.
15. EXISTING SITE FEATURES, MATERIALS, ADJACENT LANDSCAPING, ETC. DAMAGED DURING THE COURSE OF THE PROJECT SHALL BE REPAIRED, REPLACED, OR REPLACED BY THE RESPONSIBLE TRADE CONTRACTOR(S) AT NO ADDITIONAL COST TO THE OWNER AND TO THE SATISFACTION OF THE OWNER AND ARCHITECT.
16. CONTRACTOR SHALL COORDINATE THE WORK WITH ALL PARTIES INVOLVED IN THAT THE CONSTRUCTION CAN PROCEED SMOOTHLY.
17. THE CONTRACTOR SHALL ALTER OR REMOVE ANY EXISTING MATERIAL WARNING: ASBESTOS-CONTAINING BUILDING MATERIALS ARE OR MAY BE PRESENT IN THIS BUILDING. NO PERSON MAY DISTURB ASBESTOS-CONTAINING MATERIALS UNLESS THE PERSON IS A LICENSED ASBESTOS ABatement CONTRACTOR SUCCESFULLY COMPLETED TRAINING (WITH SPECIFICATIONS) CONTAINED IN THE PROJECT DOCUMENTS AND IN COMPLIANCE WITH CLINIOED DIRECTIVE OF HEALTH RULES AND REGULATIONS.

ABBREVIATIONS	
ABB	DESCRIPTION
RO	ROUGH OPENING
ROW	RIGHT OF WAY
RP	RESIN PANEL
RS	ROLLER SHADE - MOTORIZED
RSES	SKYLIGHT ROLLER SHADE - MOTORIZED
RL	ROLLER SHADE LEFT CONTROL
RSR	ROLLER SHADE RIGHT CONTROL
RT	RESILIENT TRANSITION
RTU	ROOF TOP UNIT
RUBER	RUBBER
SC	SHOWER CURTAIN
SD	SOAP DISPENSER
SECT	SECTION
SHT	SHEET
SM	SIMILAR
SND	SANITARY NAPKIN DISPOSAL
SNV	SANITARY NAPKIN VENDOR
SPEC	SPECIFICATION
SPM	SINGLE PLY MEMBRANE
SQ	SQUARE
SS / ST STL	STAINLESS STEEL
SSF	SOLID SURFACE
SSG	STRUCTURAL GLAZING
ST	SEALANT TAPE
ST	STEEL
STC	SOUND TRANSMISSION COEFFICIENT
STD	STANDARD
STL	STEEL
STOR	STORAGE
STRUCT	STRUCTURAL
STP	STONE THRESHOLD
STV	STONE
SUS	SUSPENDED
SU	SHEET VINYL
T	TREAD
T	TALL STORAGE CABINET
TOP	TOP OF
TB#	TACKBOARD # DENOTES WIDTH; REFER TO INTERIOR ELEVATIONS FOR MOUNTING HEIGHTS)
TBR	TOWEL BAR
TC	TOWEL COMPARTMENT
TD	TRENCH DRAIN
TEL	TELEPHONE
THF	TOP OF FINISH FLOOR
THK	THICK
TP	TOILET PAPER
TPD	TOILET PAPER DISPENSER
TRP	THERMOPLASTIC OLEFIN
TRZ	TERRAZZO
TS#	TACK STRIP # DENOTES WIDTH; REFER TO INTERIOR ELEVATIONS FOR MOUNTING HEIGHTS)
TU	TELEVISION
TV	TYPICAL
UC	UNDER COUNTER
UNO	UNLESS NOTED OTHERWISE
UR	URINAL
US	URINAL SCREEN
VB	VAPOR BARRIER
VB	VINYL BASE
VBFS	RECESSED VOLLBALL FLOOR SLEEVE
VCC	VOLUME CONTROL
VCT	VINYL COMPOSITION TILE
VDB	VISUAL DISPLAY BOARD
VEND	VENDING MACHINE
VERT	VERTICAL
VEST	VESTIBULE
VF	VEREY IN FIELD
VP	VENT PIPE
VT	VINYL TILE
VWC	VINYL WALL COVERING
W	WALL CABINET
W	WITH
WD	WASHER / DRYER
WO	WITHOUT
WC	WATER CLOSET
WCD	WALK CLEAN OUT
W	WOOD
WM	WALKOFF MAT
WP	WATERPROOF
WPNL	WOOD PANEL
WPT	WORK POINT
WWF	WELDED WIRE FABRIC
YCO	YARD CLEAN OUT

ABBREVIATIONS	
ABB	DESCRIPTION
MD	MASONRY DIMENSION
MECH	MEDIUM DENSITY FIBERBOARD
MECH	MECHANICAL
MED	MEDIUM
MEZZ	MEZZANINE
MFR./MANUF.	MANUFACTURER
MH	MAN-HOLE
MIN	MINIMUM / MINUTE
MISC	MISCELLANEOUS
NL	NATCH LINE
NLO	NAIL OR NAILING
NP	NAIL PANEL
MP	MOSAIC TILE
MTB	MOSAIC TILE BASE
MT	METAL TRANSITION
MTL	MOUNTED
MTL	METAL
MU	MECHANICAL UNIT
MW	MICROWAVE
MMWL	METAL WARDROBE LOCKER
MX	MAILBOX UNIT
NC	NOISE CRITERIA
NC	NOT IN CONTRACT
NL	NARROW LIGHT DOOR
NLR	NARROW LIGHT DOOR - RATED
NLR-2	NARROW LIGHT DOOR - RATED PAIR
NO	NUMBER
NOM	NOMINAL
NTS	NOT TO SCALE
OA	OVERALL
OC	ON CENTER
OOD	OVERHEAD COILING DOOR
OD	OUTSIDE DIAMETER
OH	OPPOSITE HAND
OPNG	OPENING
OPP	OPPOSITE
ORD	OVERFLOW ROOF DRAIN
OSB	ORIENTED STRAND BOARD
OSD	OPEN SITE DRAIN
P	PHONE OUTLET
PART	PARTITION
PATT	PATTERN
PC	PRECAST CONCRETE
PCC	POLISHED CONCRETE
PL	PLY LINE
PLAM	PLASTIC LAMINATE
PLWD	PLYWOOD
PNT	PAINT
PR	PAIR
PREFAB	PREFABRICATED
PSE	MOTORIZED PROJECTION SCREEN
PSF	POUNDS PER SQUARE FOOT
PSI	POUNDS PER SQUARE INCH
PSM	MANUAL PROJECTION SCREEN
PT	PORCELAIN TILE
PTB	PORCELAIN TILE BASE
PTD	PORTAL TOWEL DISPENSER
PTD	PAINTED
PTF	PORCELAIN TILE FLOOR
PTTS	PORCELAIN TILE STAR TREAD
PTTST	PORCELAIN TILEACTIC WARNING STRIP
PTW	PORCELAIN TILE WALL
PVC	POLYVINYL CHLORIDE
Q	QUAD POWER OUTLET
QT	QUARRY TILE
QTY	QUANTITY
R	RISER
RAD	RADIUS
RAL	ROOF LADDER
RB	RUBBER BASE
RBSST	RUBBER STAR TREAD
R	ROOF DRAIN
REF	REFERENCE / REFER TO
REF	REFRIGERATOR
REINF	REINFORCED
REQD	REQUIRED
RES	RESINUS FLOORING
RESB	RESINUS INTEGRAL BASE
REV	REVISION
RF	RUBBER FLOOR
RFM	RUBBER FLOOR TILE
RM	ROOM

ABBREVIATIONS	
ABB	DESCRIPTION
EP	ELECTRICAL PANEL
EQ	EQUAL
EWC	ELECTRIC WATER COOLER
EWS	EYE WASH STATION
EX/EXIST	EXISTING
EXP	EXPOSED
EXR	EXISTING TO REMAIN
F	FLUSH DOOR
F	FACE OF
FACP	FIRE ALARM SYSTEM ANNUNCIATOR PANEL
FACP	FIRE ALARM CONTROL PANEL
FAP-X	FABRIC WRAPPED ACOUSTIC PANEL - (X = THICKNESS OF THE PANEL)
FB	FABRIC
FB	FACE BRICK
FBN	FLIP BENCH
FBO	FURNISHED BY OWNER
FCD	FLOOR CLEAN OUT
FO	FLOOR DRAIN
FE	FIRE EXTINGUISHER
FEC	FIRE EXTINGUISHER CABINET
FECB	FIRE EXTINGUISHER CABINET AND BLANKET
FF	FACTORY FINISH
FG	FULL GLASS DOOR
FG-2	FULL GLASS DOOR - PAIR
FH	FULL HEIGHT
FL	FLUSH LOUVER DOOR
FL-2	FLUSH LOUVER DOOR - PAIR
FLR	FLOOR
FOF	FACE OF FOUNDATION
FOM	FACE OF MASONRY
FS	FACE OF STUD
FOW	FACE OF WALL
FT	FOOT / FEET
GA	GAUGE
GALV	GALVANIZED
GC	GAS METER AND REGULATOR
GB	GRAB BAR
GS	GENERAL CONTRACTOR
GL	GLASS
GL BLK	GLASS BLOCK
GLZ	GLAZING
GRND	GROUND
GWB	GYPSPUM WALL BOARD
GYP	GYPSPUM
H	HOSE BIBB
HD	HIGH DENSITY HAND DRYER
HDS	HIGH DENSITY STORAGE
HDWR	HARDWARE
HG	HALF GLASS DOOR
HG-2	HALF GLASS DOOR PAIR
HMT	HOLLOW METAL
HORIZ	HORIZONTAL
HORIZ	HIGH POINT
HPC	HIGH PERFORMANCE COATING
HR	HOUR
HT	HEIGHT
HVAC	HEATING, VENTILATION, AIR CONDITIONING
HWH	HOT WATER HEATER
ID	INSIDE DIAMETER
IN	INCH
INFO	INFORMATION
INSUL	INSULATION
INT	INTERIOR
IPS	INTERIOR PAINT SYSTEM
JC	JANITORS CLOSET
JT	JOINT
KB	KNOX BOX
KS	KNEE SPACE
LAM	LAMINATED
LAV	LAVATORY
LN	LINE/UM
LP	LOW POINT
LTL	UNTEL
LVR	LOUVER
LVT	LUXURY VINYL TILE
M	MIRROR
MATL	MATERIAL
MAX	MAXIMUM
MEAS	MEASUREMENT (DENOTES WIDTH - REFER TO INTERIOR ELEVATIONS FOR MOUNTING HEIGHTS)
MCM	METAL COMPOSITION MATERIAL

ABBREVIATIONS	
ABB	DESCRIPTION
A/C	AIR CONDITIONING
ABV	ABOVE
AC	ARCHITECTURAL CONCRETE
ACM	ALUMINUM COMPOSITE MATERIAL
ACT	ACOUSTIC CEILING TILE
ADA	AMERICANS WITH DISABILITIES ACT
ADJ	ADJACENT
ADO	AUTOMATIC DOOR OPERATOR
ADOP	AUTOMATIC DOOR OPERATOR ON PEDESTAL
AEC	ARCHITECTURALLY EXPOSED CONCRETE
AED	AUTOMATED EXTERNAL DEFIBRILLATOR
AESS	ARCHITECTURALLY EXPOSED STRUCTURAL STEEL
AFF	ABOVE FINISHED FLOOR
AHU	AIR HANDLING UNIT
ARB	AIR INFLTRATION BARRIER
ALT	ALTERNATE
ALUM./AL	ALUMINUM
ANOD	ANODIZED
AGR	AREA OF REFUGE
AP	ACCESS PANEL
APPROX	APPROXIMATELY
ARA	AREA OF RESCUE ASSISTANCE
ARCH	ARCHITECTURAL
AS	ACOUSTICAL SEALANT
ASH	ADJUSTABLE SHOWER HEAD
AWP	ACOUSTIC WALL PANEL
B	BASE CABINET
BT	BOTTOM OF
B&T	BIO-BASED TILE
BA	BOARD
BF	BOTTLE FILLER
BLK	BLOCKING
BO	BY OWNER
BRZ	BRONZE
BS	BOTH SIDES
BSMT	BASEMENT
CB	CATCH BASIN
CC	CORNER JOINT
CG	CORNER GUARD
CH	COAT HOOK
CJ	CONTROL JOINT
CL	CENTER LINE
CLG	CEILING
CLR	CLEARANCE
CMU	CONCRETE MASONRY UNIT
CNTR	COUNTER
CO	CLEAN OUT
COL	COLUMN
CONC	CONCRETE
CONST	CONSTRUCTION
CONT	CONTINUOUS
CONTR	CONTRACTOR
CORR	CORRIDOR
CP	CENTER POINT
CPT	CARPET (BROADLOOM)
CPTT	CARPET TILE
CR	CARD READER
CT	CERAMIC TILE
CTB	CERAMIC TILE BASE
CTF	CERAMIC TILE FLOOR
CTW	CERAMIC TILE WALL
DO	DATA OUTLET
DF	DRINKING FOUNTAIN
DIA	DIAMETER
DIAG	DIAGONAL
DN	DIMENSION
DISH	DISHWASHER
DLO	DAY/LITE OPENING
DN	DOWN
DR	DOOR
DS	DOWNSPOUT
DW	DOMESTIC WATER
DWG	DRAWING
EA	EACH
EC	EXPOSED CONSTRUCTION
EF	EACH FACE
EH	EXHAUST HOOD
EHD	ELECTRIC HAIR DRYER
EL	EXPANSION JOINT
EL/ELEV	ELEVATION
ELEC	ELECTRICAL
EMS	ENTRANCE MAT SYSTEMS


[illegible]

PROJECT NUMBER	220005.00
DATE OF ISSUE	02.21.2020
DRAWN BY	TW
CHECKED BY	TH

SYMBOLS AND PROJECT GENERAL NOTES


G-201.2

ISSUED FOR BIDDING


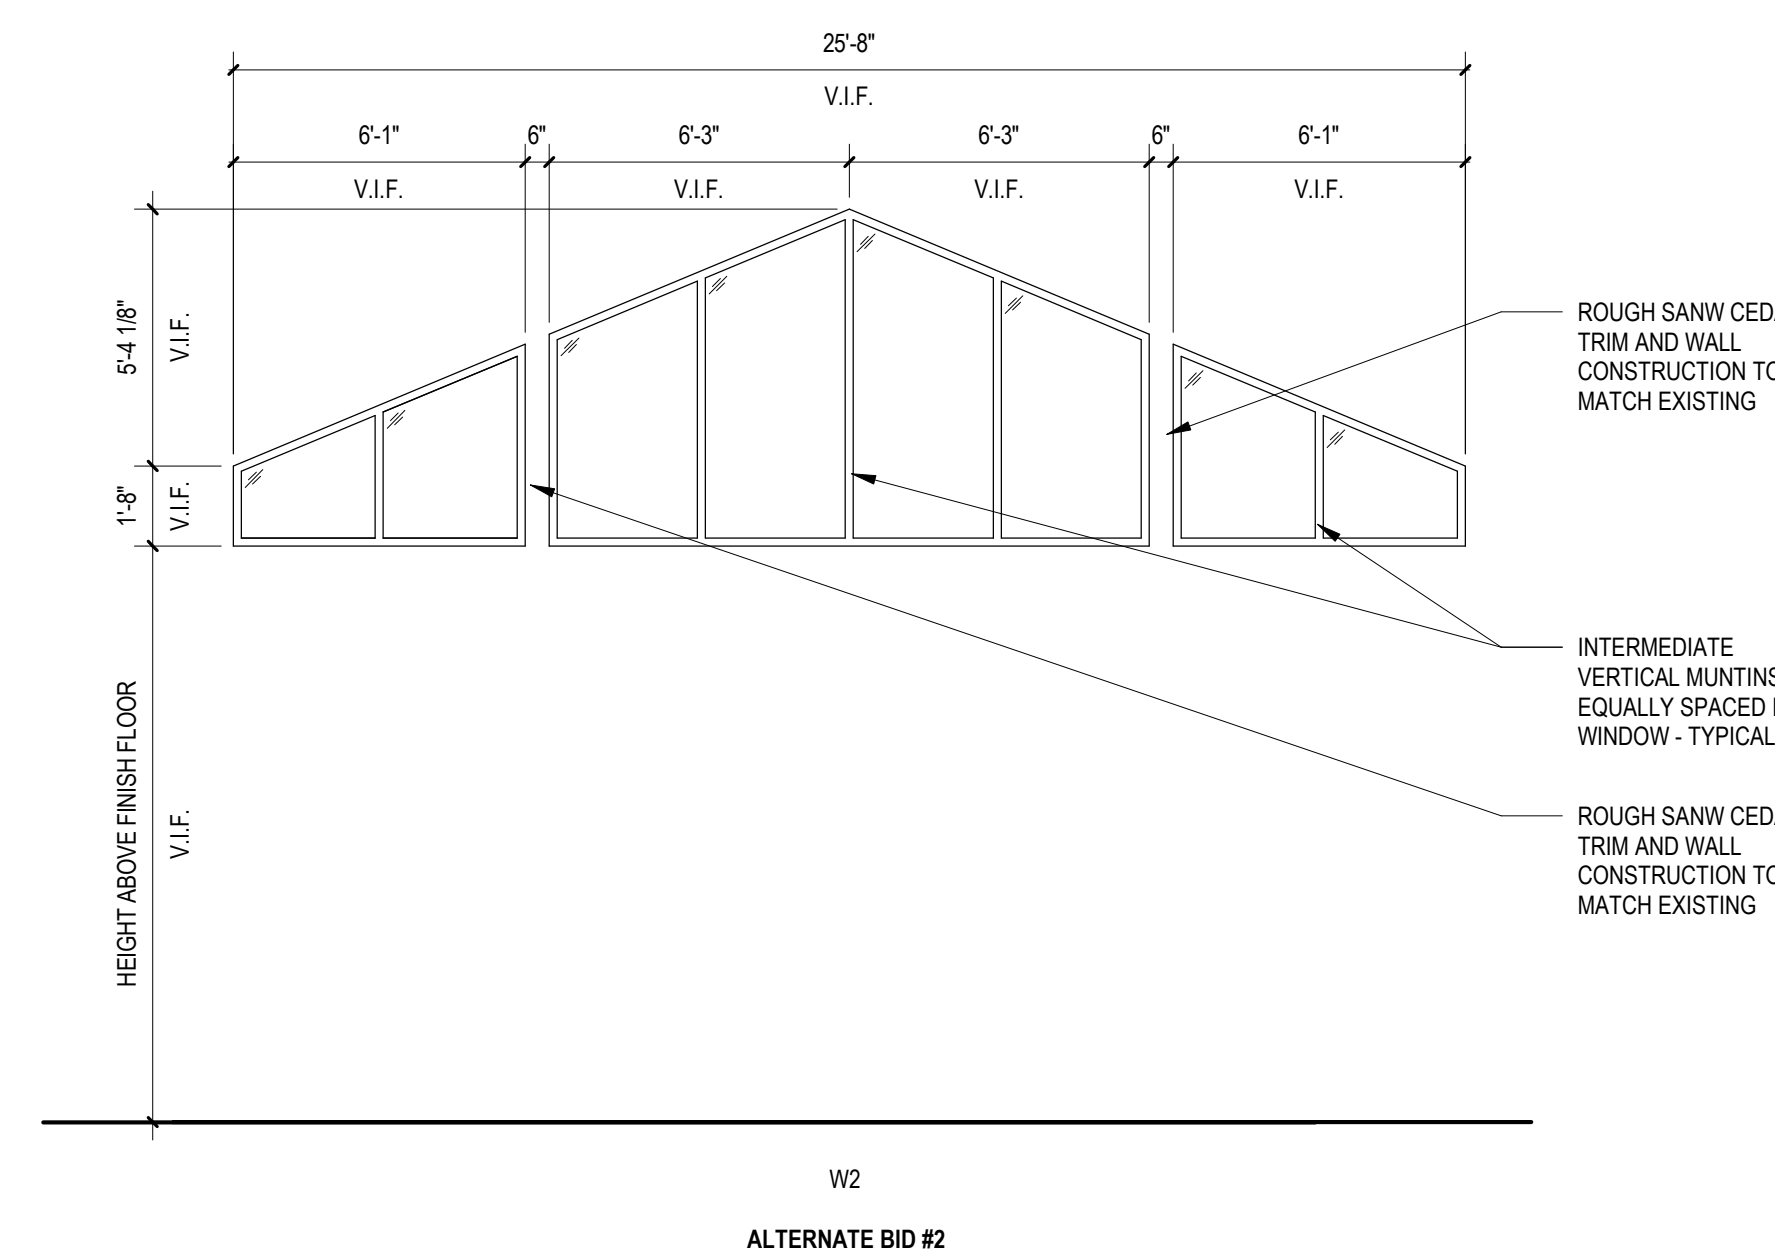
[illegible]

F FRAME TYPES
1/4" = 1'-0"

W WINDOW TYPES
1/4" = 1'-0"

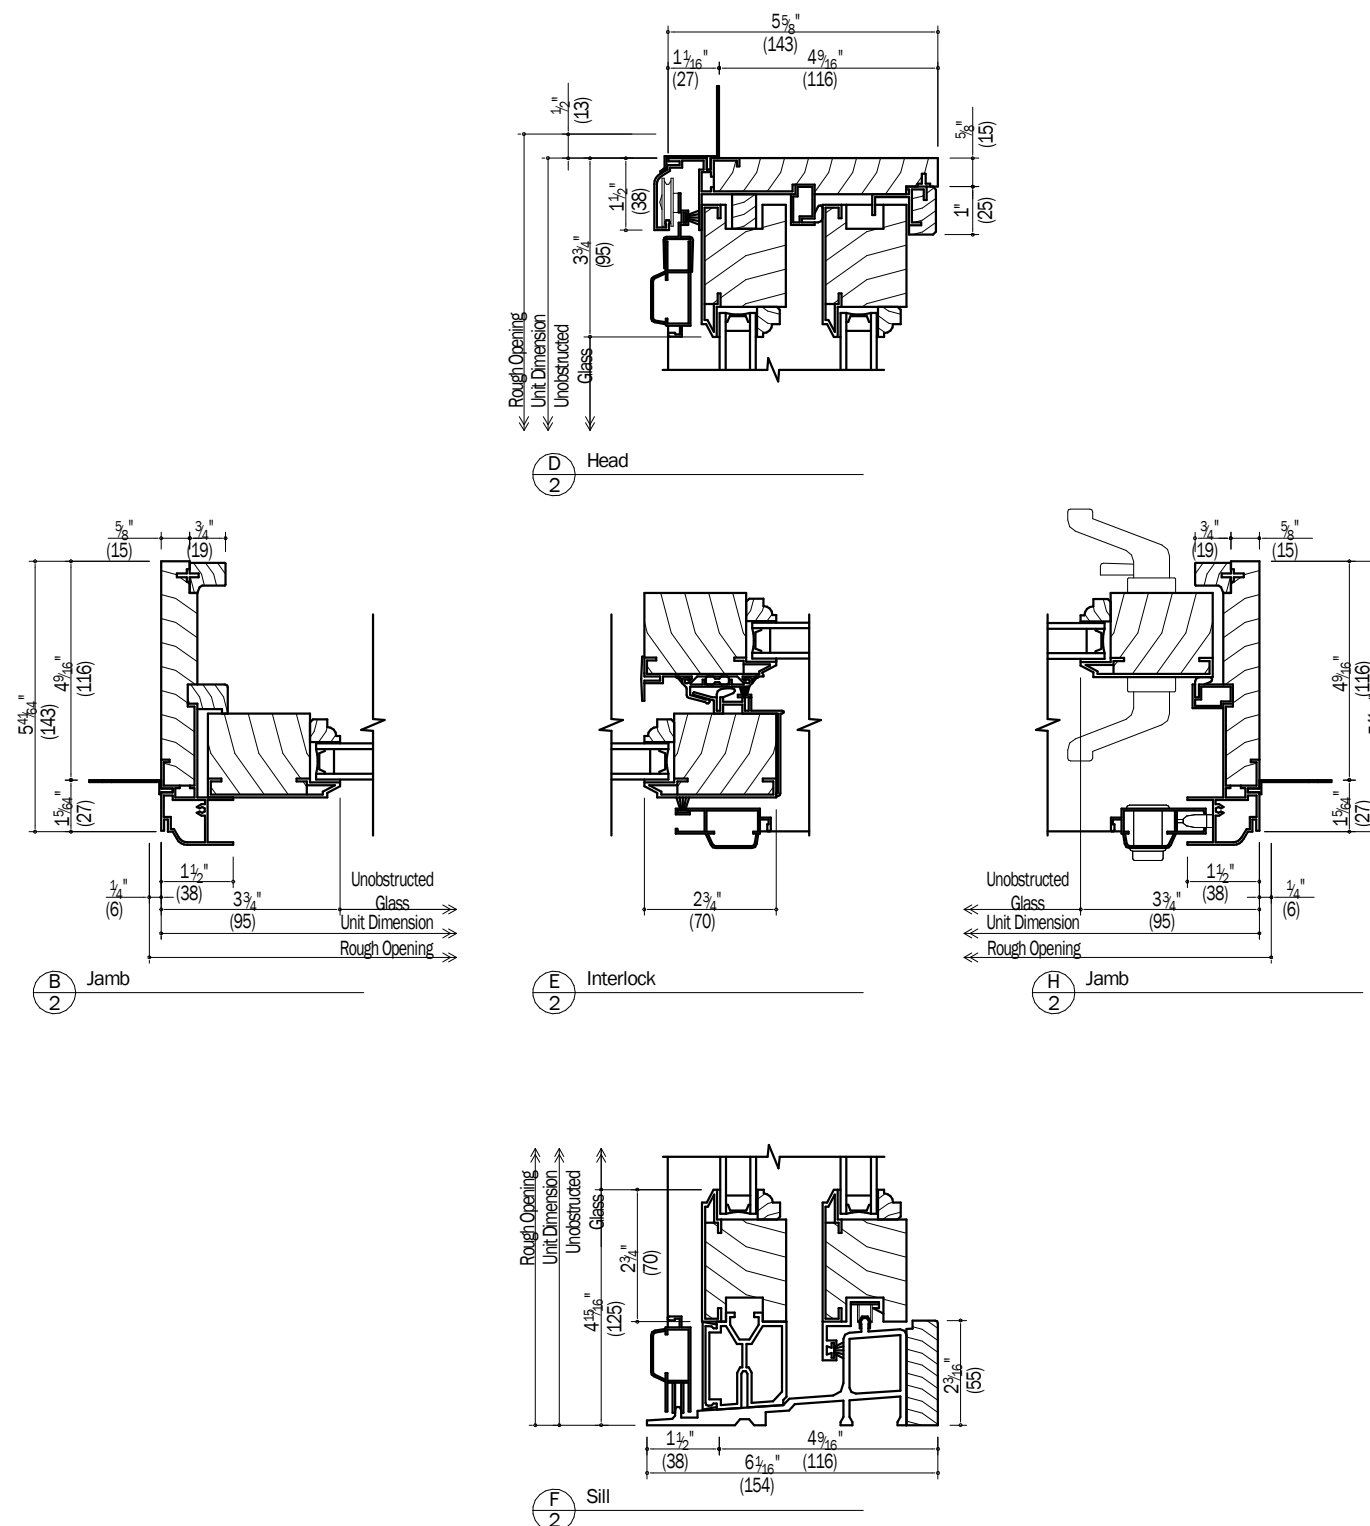

2 TYPICAL SLIDING DOOR HEAD, JAMB AND SILL DETAILS
3" = 1'-0"

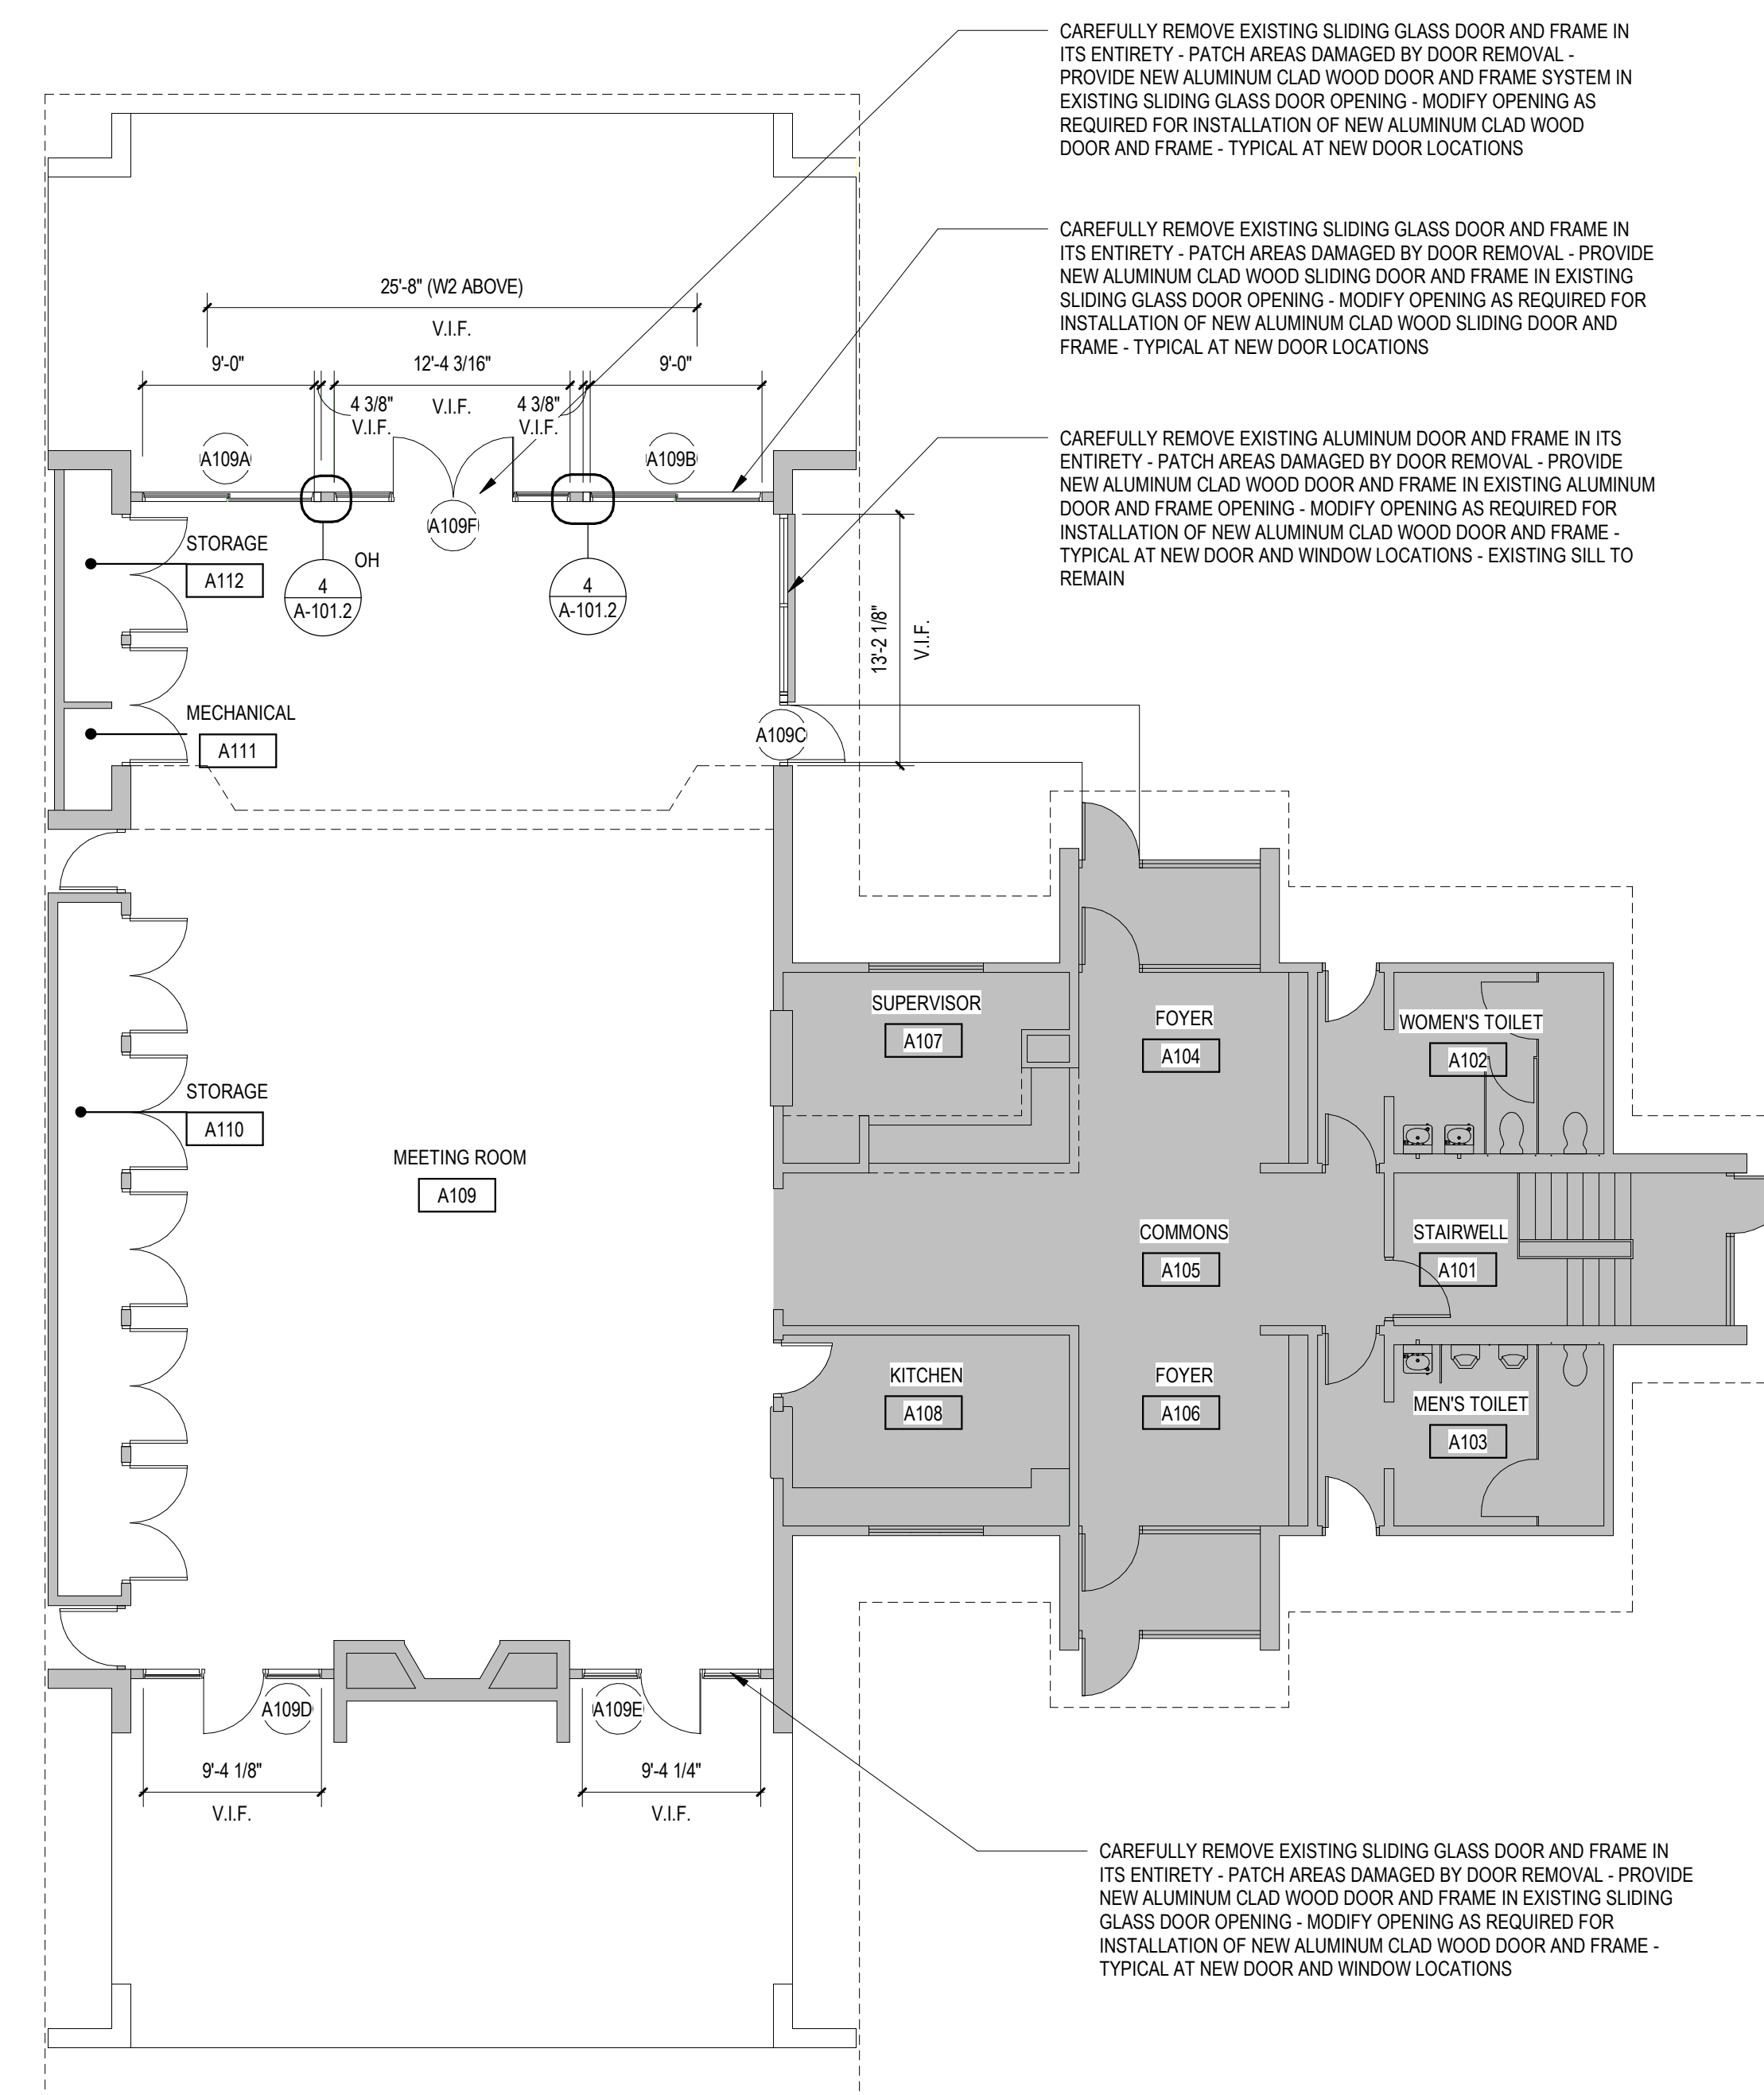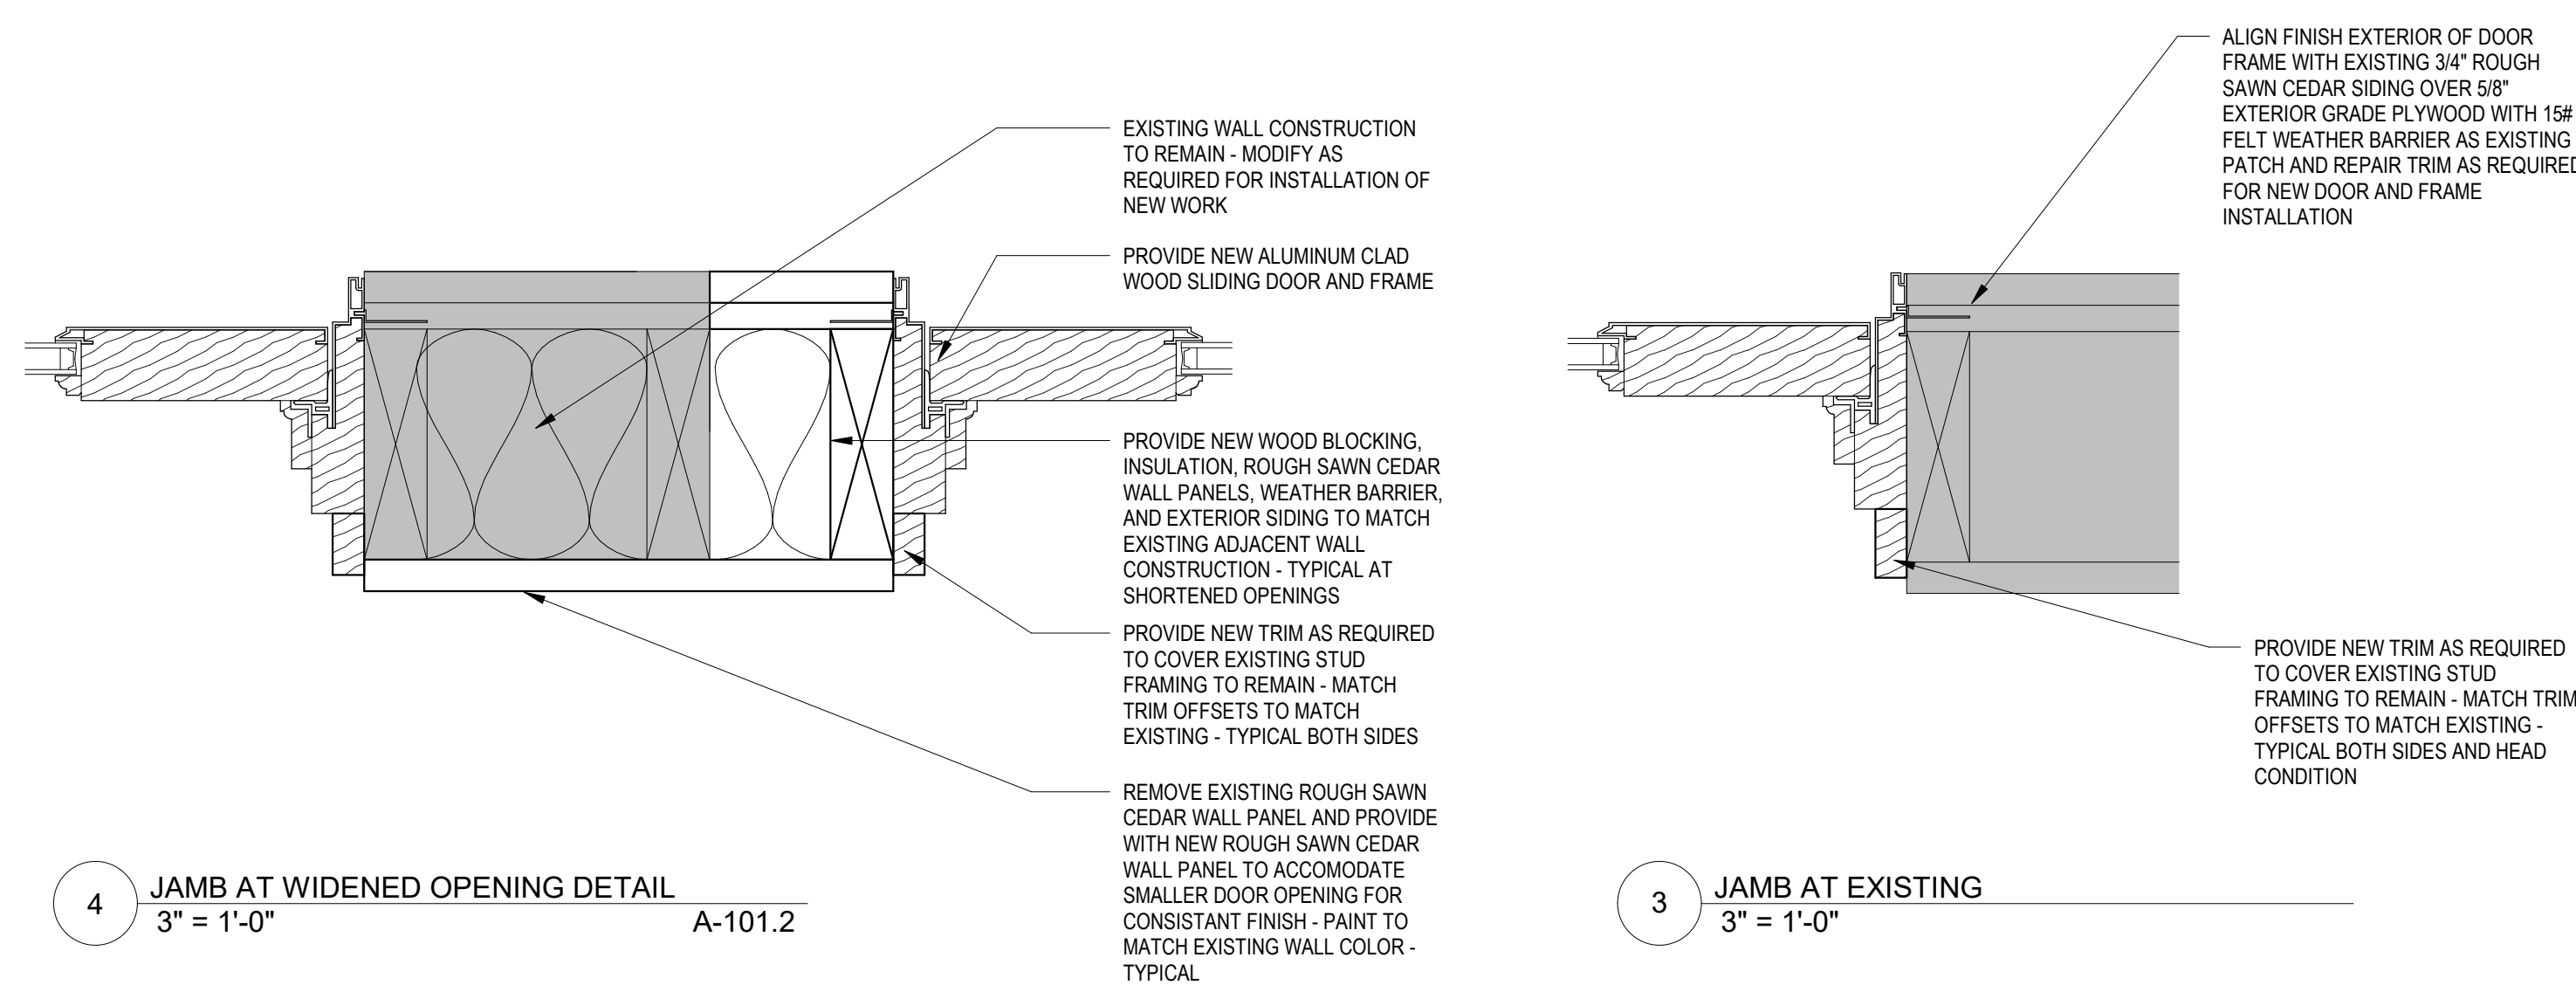

1 FIRST FLOOR PLAN
1/8" = 1'-0"